

HDMI EXTENDER

User Manual

HDMI Extender over Single cat5e/6 with IR (150M)

(Full HD 1080P TCP/IP)

Bring High-Definition to your life!

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

1.0 Introduction

The HDMI Extender over ONE CAT5e/6 is a tool for extending your HDMI signal over long distances to a compatible display. Instead of using expensive HDMI cables, your existing CAT 5e/6 cables/sockets can be utilized to perform advanced functions like transferring Deep Color (12 bits/color) video and digital audio, with a bandwidth up to 225MHz. The HDMI Transmitter and Receiver, over ONE CAT 5e/6 extender is your substantial HDMI extender tool. The HDMI Extender also support IR re-transmitting, so you can control the Source which is 150 meters outside using the HDMI Extender.

2.0 Features

1. DC 5V power supply;
2. HDMI 1.3, HDCP 1.1 and DVI 1.1 compliant;
3. Support Deep Color up to 12 bits/color;
4. Support 20~60KHz IR re-transmitting;
5. Uses one CAT5e/6 cable for data/DDC transmission;
6. Equalizes and recovers incoming TMDS data before transmitting it in optimal quality regardless of the incoming signal quality;
7. Cable testing showed that with 1080p resolution the HDMI input source can be 10 meters away;
8. When transmitting a signal in 1080p resolution the CAT6 operating distance is 150 meters(max).

3.0 Packaging accessories

When first unpacking your extender please check to see if the following items are included:

HDMI Extender Transmitter -----	1PCS
HDMI Extender Receiver -----	1PCS
IR Transmitter -----	1PCS
IR Receiver -----	1PCS
5V DC Power Supply adaptor -----	2PCS
Operation Manual -----	1PCS

4.0 Specifications


Frequency Bandwidth	2.25Gbps (single link)
HDMI Transmitter Input/ Output Ports	1x HDMI Female port/1 x CAT6
HDMI Receiver Input/ Output Ports	1 x HDMI Female port/1 x CAT6
Power Supply	DC 5V
ESD Protection Human Body Model:	± 8kV (air-gap discharge)

HDMI Extender over Single cat5e/6 with IR TCP/IP (150M)

	± 4kV (contact discharge)
Dimensions (mm)	65(W) X 100 (D) X 25 (H)
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)


5.0 Operation controls and Functions

HDMI Extender Transmitter

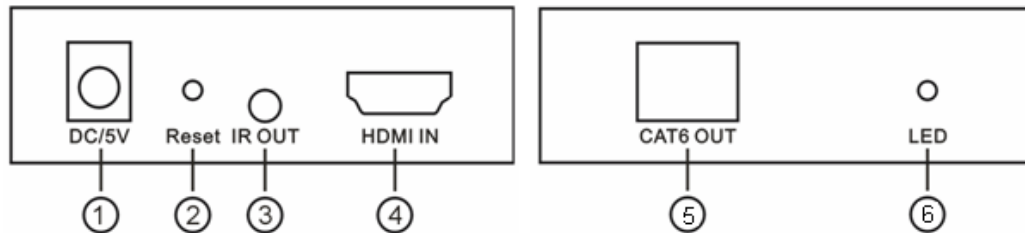

1. Power: Plug the 5V power supply into the unit and connect the adaptor to AC wall outlet.
2. RESET: Factory reset button. When the Receiver system functions have been changed, Pressing this button for 10 seconds can realize factory reset.
3. IR OUT: Remote control signal transmit, connect the IR transmit cable with HDMI Extender Transmitter. The IR transmit cable face to the IR receiver of the Source.
4. HDMI: HDMI Input port.
5. CAT6 OUT: Connect the CAT 5e/6 output of the Transmitter with the CAT 5E/6 input of the HDMI over single CAT6 receiver.
6. LED indicator: When the DC power on, the indicator will be light.

HDMI Extender Receiver

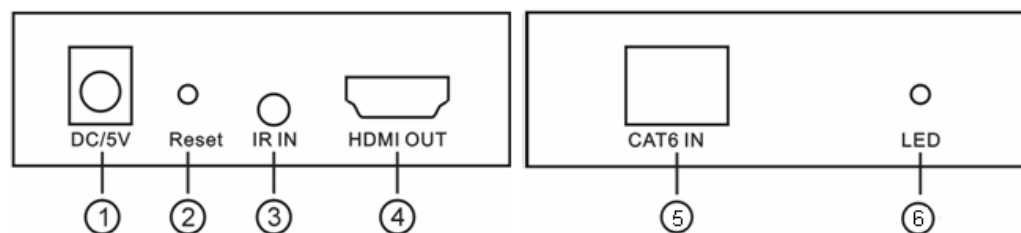


1. Power: Plug the 5V DC power supply into the unit and connect the adaptor to AC wall outlet.
2. RESET: Factory reset button. When the Receiver system functions have been changed, Pressing this Button for 10 seconds can realize factory reset.
3. IR IN: Remote control signal Receive, connect the IR receive cable with HDMI Extender Receiver.

HDMI Extender over Single cat5e/6 with IR TCP/IP (150M)

4. HDMI Out: HDMI output port.
5. CAT6 IN: Connect the CAT6 in of the the receiver with the CAT6 input of the HDMI over single CAT6 transmitter.
6. LED indicator: When the DC power on, the indicator will be light.

6.0 Application Example

6.01 Transmitter and Receiver one by one application.

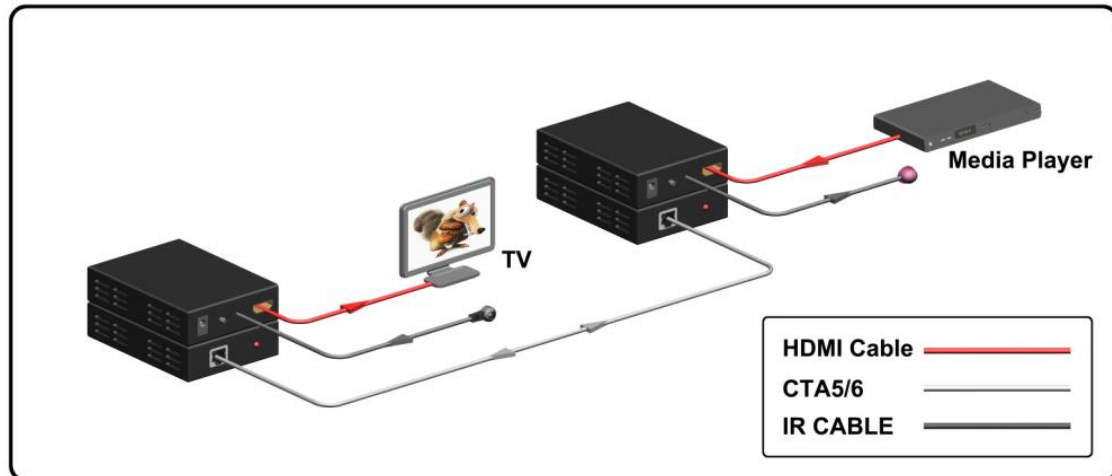

6.02 Transmitter and Receiver one by N application, N can up to 253.

