

20 MHz/10MHz/7MHz/4MHz DDS FUNCTION GENERATOR



SFG-2100 Series (20/10/7/4 MHz)



SFG-2000 Series (20/10/7/4 MHz)



FEATURES

- * DDS Technology and FPGA Chip Design
- * Frequency Range: 0.1Hz~4/7/10/20 MHz
- * High Frequency Accuracy : ±20ppm
- * High Frequency Stability : ±20ppm
- * Frequency Resolution : 100mHz
- * Low Distortion Sine Wave : -55dBc, 0.1Hz ~ 200kHz
- * Front Panel Setting Save/Recall with 10 Groups of Setting Memories
- * Built-in 9 Digits, 150MHz/High Resolution Counter (SFG-2100 Series Only)
- * INT/EXT AM/FM Modulation (SFG-2100 Series Only)
- * LIN/LOG Sweep Mode (SFG-2100 Series Only)

Based on the Direct Digital Synthesized (DDS) technology and unique FPGA design, the SFG-2000/2100 Series Function Generators are built with exceptionally high performance far exceeding that of any conventional function generators at a very competitive price. Stable output frequency, low distortion, and fine frequency resolution are the most remarkable characteristics of this product series.

The SFG-2000/2100 Series include four members in each family at 4MHz, 7MHz, 10MHz and 20MHz bandwidth (perivd), The SFG-2100 Series have additional functions of Sweep, AM/FM modulation, and External Counter. As a result of the ±20ppm stability level and output waveform accuracy, The SFG-2000/2100 Series well fit into a wide variety of applications, such as signal generator for experiment labs, reference signal for PLL (Phase Locked Loop), and calibration and adjustment source for electronic devices.


SPECIFICATIONS		SFG-2000 Series				SFG-2100 Series			
MAIN		SFG-2004	SFG-2007	SFG-2010	SFG-2020	SFG-2104	SFG-2107	SFG-2110	SFG-2120
Frequency	Range(For Sine, Square)	0.1Hz~4MHz	0.1Hz~7MHz	0.1Hz~10MHz	1Hz~20MHz	0.1Hz~4MHz	0.1Hz~7MHz	0.1Hz~10MHz	1Hz~20MHz
	Range(For Triangle)	0.1Hz~1MHz (1Hz ~ 1MHz for SFG-2020/2120)							
Resolution	Stability	0.1Hz (1Hz for SFG-2020/2120)							
	Accuracy	±20 ppm							
Output Function	Aging	±5 ppm / year							
	Amplitude Range	Sine, Square, Triangle							
Impedance	Attenuator	2mV ~ 10Vpp(into 50Ω load)							
	DC Offset	50Ω ±10%							
Duty Control	Range	-20dB±1dBx2							
	Resolution	<-5V ~ +5V(into 50Ω load)							
Display	Duty Control	20% to 80% , 2Hz ~ 1MHz (Square wave only)							
	Resolution	1%							
SINE WAVE	Flatness(Relative to 1kHz)	9 digits LED display							
	Harmonics Distortion	-55dBc, 0.1Hz~200kHz; -40dBc, 0.2MHz~4MHz; -30dBc, 4MHz~10MHz (Specification applied to both TTL/CMOS OFF and from MAX. to 1/10 level)							
TRIANGLE WAVE	Linearity	≤±0.3dB, 0.1Hz~1MHz; ≤±0.5dB, 1MHz~4MHz; ≤±2dB, 4MHz~10MHz							
	Symmetry	≥98%, 0.1Hz~100kHz; ≥95%, 100kHz~1MHz							
SQUARE WAVE	Symmetry	±1% of period + 4ns, 0.1Hz~100kHz							
	Rise or Fall Time	≤25ns at maximum output.(into 50Ω load)							
CMOS OUTPUT	Level	4Vpp±1Vpp~15Vpp±1Vpp adjustable; Rise or Fall Time ≤120ns							
	TTL OUTPUT								
Level	Fan Out	≥3Vpp							
	Rise and Fall Time	20 TTL load							
SWEEP OPERATION	Rate	≥25ns							
	Time Mode	—				100:1 ratio max. and adjustable(*) 1Sec~30Sec adjustable(**) Lin./Log. switch selector			
AMPLITUDE MODULATION	Depth & Modulation	0~100% ; 400Hz(INT), DC~1MHz(EXT)							
	Frequency	100Hz~5MHz(-3dB)							
FREQUENCY MODULATION	Carrier BW	≤10Vpp for 100% modulation							
	EXT Modulation Sensitivity								
FREQUENCY COUNTER	Deviation & Modulation	≥±50kHz, center at 1MHz, 400Hz fixed(INT), 1kHz fixed(EXT)							
	EXT Modulation Sensitivity	≤10Vpp for 10% modulation(center at 1kHz)							
Range	Accuracy	5Hz~150MHz							
	Time base	Time base accuracy ±1 count							
Resolution	Input Impedance	±20ppm(23℃±5℃)after 30 minutes warm up							
	Sensitivity	100nHz							
Sensitivity	Resolution	for 1Hz ; 0.1Hz for 100MHz							
	Sensitivity	1MΩ/150pf							
Sensitivity	Resolution	≤35mVrms (5Hz~100MHz)							
	Sensitivity	≤45mVrms (100MHz~150MHz)							

NOTE : 1.(*) In order to get the maximum sweep span, the sweep time needs to be tuned on when adjusting the sweep span.
2.(**) When the sweep time is too long, the stop frequency will reach and stay at the maximum frequency of the instrument until the end of the sweep cycle.



SFG-2100 Series

Rear Panel

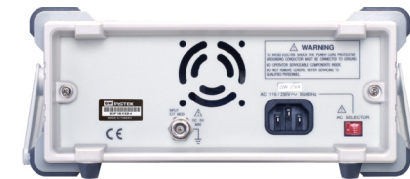

SPECIFICATIONS		SFG-2000 Series				SFG-2100 Series			
		SFG-2004	SFG-2007	SFG-2010	SFG-2020	SFG-2104	SFG-2107	SFG-2110	SFG-2120
STORE/RECALL FUNCTION		10 groups of panel settings							
POWER SOURCE		AC115V±10%, AC230V+10%/-15%, 50/60Hz							
DIMENSION & WEIGHT		266(W)×107(H)×293(D) mm; Approx. 3.1kg				266(W)×107(H)×293(D) mm; Approx. 3.2kg			

ORDERING INFORMATION	
SFG-2004	4MHz DDS Function Generator
SFG-2007	7MHz DDS Function Generator
SFG-2010	10MHz DDS Function Generator
SFG-2020	20MHz DDS Function Generator
SFG-2104	4MHz DDS Function Generator with Counter, Sweep & AM, FM Modulation
SFG-2107	7MHz DDS Function Generator with Counter, Sweep & AM, FM Modulation
SFG-2110	10MHz DDS Function Generator with Counter, Sweep & AM, FM Modulation
SFG-2120	20MHz DDS Function Generator with Counter, Sweep & AM, FM Modulation
ACCESSORIES :	
User manual x 1, Power Cord x 1	
GTL-101 test lead x1 (SFG-2000 Series)	
GTL-101 test lead x2 (SFG-2100 Series)	

SELECTION GUIDE		4MHz		7MHz		10MHz		20MHz	
FREQUENCY RANGE	MODEL	SFG-2004	SFG-2104	SFG-2007	SFG-2107	SFG-2010	SFG-2110	SFG-2020	SFG-2120
DUTY		✓	✓	✓	✓	✓	✓	✓	✓
TTL/CMOS		✓	✓	✓	✓	✓	✓	✓	✓
DC OFFSET		✓	✓	✓	✓	✓	✓	✓	✓
LIN/LOG SWEEP		✓	✓	✓	✓	✓	✓	✓	✓
AM/FM MODULATION		✓	✓	✓	✓	✓	✓	✓	✓
EXT COUNTER		✓	✓	✓	✓	✓	✓	✓	✓

תיאור פריט: מחולל אותות שולחני – 4MHz – GW INSTEK SFG-2004

יצרן: GW INSTEK

דגם: SFG-2004

מק"ט טלמיר: 4584558

מיקום באתר: ציוד בדיקה ומכשירי מדידה / מחוללי אותות / מחוללי אותות שולחניים

יבואן: טלמיר אלקטרוניקה בע"מ