


# Digital Storage Oscilloscope

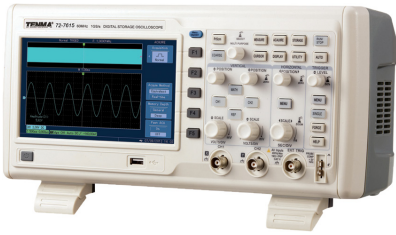

## Features:

|                           |                                      |
|---------------------------|--------------------------------------|
| Channels                  | 2                                    |
| Bandwidth                 | 60MHz                                |
| Sample Range              | 1GS/s                                |
| Rise Time                 | ≤5.8ns                               |
| Memory Depth              | 16Mpts                               |
| Waveform Acquisition Rate | ≥1,50,000wfms/s                      |
| Vertical Sensitivity      | 2mV/div to 10V/div                   |
| Time Based Range          | 2ns to 50s/div                       |
| Storage                   | Setup, Wave, Bitmap, CSV             |
| Trigger Type              | Edge, Pulse, Video, Slope, Alternate |
| Interfaces                | USB Device, USB, Host, Pass/Fail     |

## General Characteristic:

|                             |   |
|-----------------------------|---|
| Power                       | 100 - 240V AC, 45Hz - 440Hz                                       |
| LCD Size                    | 7 inches 64k Colour TFT LCD(800 × 480)                            |
| Product Colour              | White and Grey  |
| Product Net Weight          | 2.9kg   |
| Product Size                | 330mm × 155mm × 130mm   |
| Standard Accessories        | Probe × 2 (1x, 10x switchable), Power Cord USB Cable, PC Software |
| Standard Individual Packing | Gift Box English Manual   |

## Part Number Table

| Description                         | Part Number |
|-------------------------------------|-------------|
| Digital Storage Oscilloscope, 60MHz | 72-7615     |

תיאור פריט: אוסילוסקופ שולחני דיגיטלי – 2 ערוצים – 60MHz

יצרן: TENMA

דגם: 72-7615

מק"ט טלמיר: 1760542

מיקום באתר: ציוד בדיקה ומכשירי מדידה / אוסילוסקופים / אוסילוסקופים שולחניים

יבואן: טלמיר אלקטרוניקה בע"מ

