


Digital Storage Oscilloscope

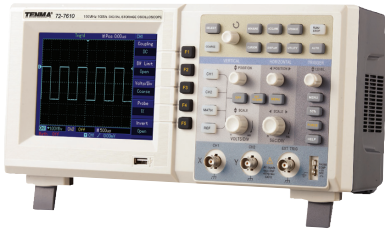

Features:

| | |
|---------------------------|----------------------------------|
| Channels | 2 |
| Bandwidth | 150MHz |
| Sample Range | 1GS/s |
| Rise Time | ≤2.3ns |
| Memory Depth | 25kpts |
| Waveform Acquisition Rate | ≥2,000wfms/s |
| Vertical Sensitivity | 2mV/div to 5V/div |
| Time Based Range | 2ns to 50s/div |
| Storage | Setup, Wave, Bitmap |
| Trigger Type | Edge, Pulse, Video and Alternate |
| Interfaces | USB Device, USB, Host, Pass/Fail |

General Characteristic:

| | |
|-----------------------------|--|
| Power | 100 - 240V AC, 45Hz - 440Hz |
| LCD Size | 5.7 inches 64k Colour TFT LCD(320 × 240) |
| Product Colour | White and Grey |
| Product Net Weight | 2.5kg |
| Product Size | 320mm × 150mm × 130mm |
| Standard Accessories | Probe × 2 (1x, 10x switchable), Power Cord USB Cable, PC Software CD |
| Standard Individual Packing | Gift Box English Manual |

Part Number Table

| Description | Part Number |
|--------------------------------------|-------------|
| Digital Storage Oscilloscope, 150MHz | 72-7610 |

תיאור פריט: אוסילוסקופ שולחני דיגיטלי – 2 ערוצים – 150MHZ

יצרן: TENMA

דגם: 72-7610

מק"ט טלמיר: 0760542

מיקום באתר: ציוד בדיקה ומכשירי מדידה / אוסילוסקופים / אוסילוסקופים שולחניים

יבואן: טלמיר אלקטרוניקה בע"מ

