


Oscilloscopes

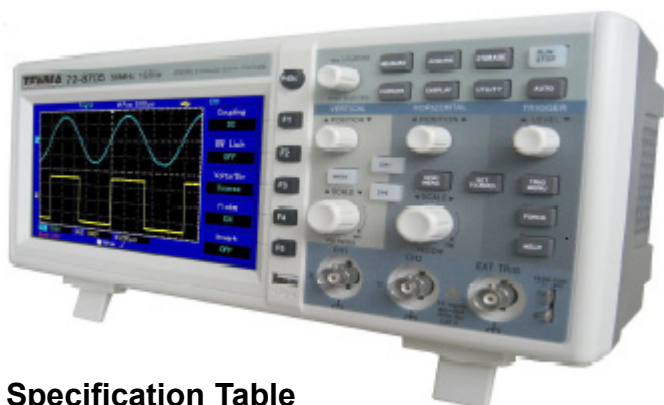

Specification Table

Bandwidth	100 MHz
Rise Time	≤3.5 ns
Real-Time Sampling Rate	1 GS / s
Equivalent Sampling Range	50 GS / s
Vertical Sensitivity	1 mV to 20 V / div
Record Length (Maximum)	2 × 600 k
Scan Time Base	2 ns to 50 s / div
Trigger Type	Edge, Pulse, Video and Alternate
Automatic Waveform Measurements	28
Ports	USB OTG
Mathematics	Add, Subtract, Multiply, Divide, FFT
Others Features	Special print screen feature

General Characteristics

Power	100 - 240 V _{rms} ac, 45 Hz - 440 Hz, CAT II
LCD Size	Diagonal 178 mm (7 inches)
Product Net Weight	2.2 kg
Product Size	306 mm × 147 mm × 122 mm
Standard Accessories	Probe × 2 (1x, 10x Switchable), Power Cord and English Manual UT-D05 USB Cable, PC Communication Software
Standard Individual Packing	Gift Box
Standard Quantity Per Carton	2 pcs
Standard Carton Measurement	445 × 410 × 270 mm (0.055 CBM Per Export Carton)
Standard Carton Gross Weight	Around 8.5 kg

Part Number Table

Description	Part Number
DSO, 100 MHz, 2 CH, 178 mm (7 IN) Screen	72-8710

תיאור פריט: אוסילוסקופ שולחני דיגיטלי - 2 ערוצים - 100MHz

יצרן: TENMA

דגם: 72-8710

מק"ט טלמיר: 0606381

מיקום באתר: ציוד בדיקה ומכשירי מדידה / אוסילוסקופים / אוסילוסקופים שולחניים

יבואן: טלמיר אלקטרוניקה בע"מ