


4.3-10 Jack to N Jack Adapter

RoHS
Compliant



Specifications:

Impedance	: 50Ω
Frequency Range	: 0-6 GHz
Insertion Loss	: -0.01dB × √Frequency Ghz
VSWR Max.	: ≤1.15
PIM	: ≤-160 dBc
Dielectric Withstanding Voltage	: 2,000V AC
Insulation Resistance	: 1,000MΩ
Operating Temperature	: -40°C to +155°C

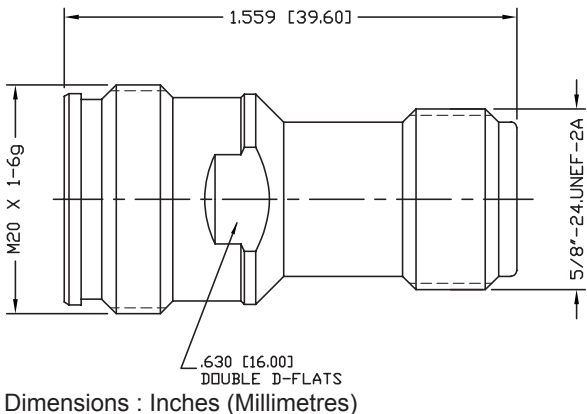

Description	Material	Finish	Qty.
Body	Brass	White Bronze	1
Contact	BeCu	Silver	1
Insulator	PTFE	-	1
Ground Ring	BeCu	White Bronze	1

Part Number Table

Description	Part Number
4.3-10 Jack to N Jack Adapter	MCRF0004