


DIN Plug to 4.3-10 Jack Adapter

RoHS
Compliant



Specifications:

Impedance	: 50 Ω
Frequency Range	: 0-6 GHz
PIM.	: -160 dBc Max. (1,900 MHz)
VSWR	: 0 to 3 GHz <1.1:1
VSWR	: 3 to 4 GHz <1.15:1
VSWR	: 4 to 6 GHz <1.25:1
Inserting Loss	: 0.05 dB Max. @ 3.0 GHz
Insulation Resistance	: 5K M Ω
Working Voltage	: 1,200 Vrms Max.
Mating Cycles	: 500
Temperature Range	: -50°C to +85°C

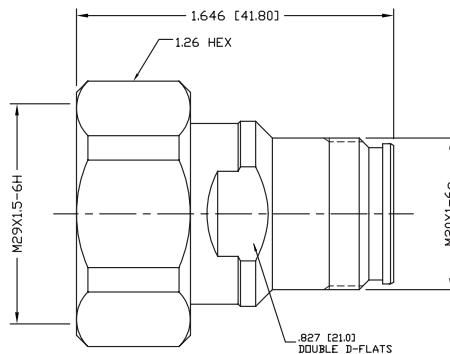

Dimensions : Inches (Millimetres)

Description	Material	Finish	Qty.
Body	Brass	White Bronze	1
Insulator	PTFE	-	1
Contact	BeCu	Silver	1
Retaining Ring	BeCu	White Bronze	1
Shell	Brass	White Bronze	1
Gasket	Rubber	-	1
Ground Ring	BeCu	White Bronze	1

Part Number Table

Description	Part Number
DIN Plug to 4.3-10 Jack Adapter	MCRF0011