

DS, DP, DA Series

**RoHS
Compliant**

Specifications:

Mechanical

Mechanical Life : 2,000 operations per switch.
Operation Force : 400gf max. (DP Series)
1,000gf max. (DS & DA Series)

Stroke : 2.0mm
Operation Temperature : -20°C to +70°C
Storage Temperature : -40°C to +85°C

Electrical


Electrical Life : 2,000 operations per switch 24V DC, 25mA
Non-Switching Rating : 100mA , 50V DC
Switching Rating : 25mA , 24VDC
Contact Resistance : 50mΩ max. at initial
Insulation Resistance : {at 500 VDC} 100MΩ min.
Dielectric Strength : 500VAC / 1 minute
Circuit : SPST

Materials

Base : Thermoplastic
Colour : Black
Cover : Thermoplastic
Colour : Red, Black, Blue
Actuator : High Thermoplastic
Colour : White
Contact : Phosphor bronze with gold plating over nickel
Top Seal : Polyester Film
Potting Material : Epoxy

Dimensions:



DS(R)

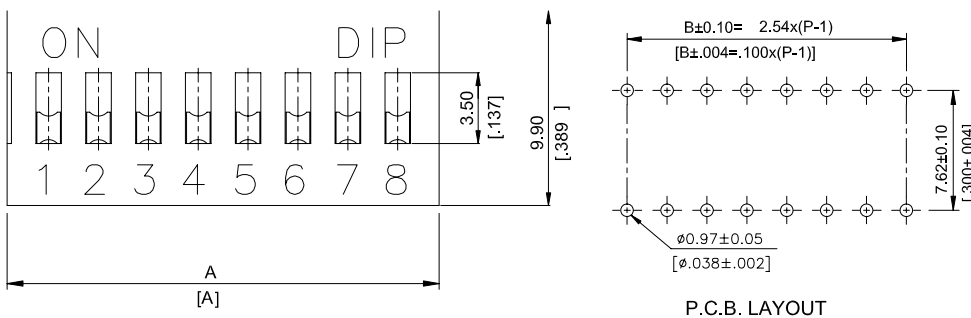


Dimensions : Millimetres (Inches)

DS, DP, DA Series

DS(R)

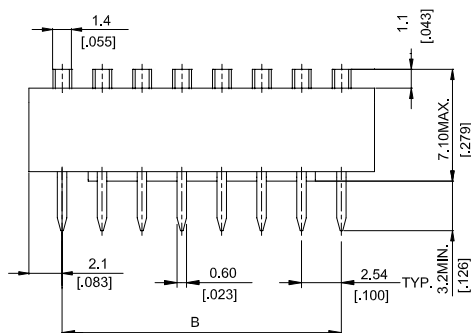


DS -12 DSR-12	12	31.84[1.254]	27.94[1.100]
DS -10 DSR-10	10	26.76[1.054]	22.86[.900]
DS -09 DSR-09	9	24.22[.954]	20.32[.800]
DS -08 DSR-08	8	21.68[.854]	17.78[.700]
DS -07 DSR-07	7	19.14[.754]	15.24[.600]
DS -06 DSR-06	6	16.60[.654]	12.70[.500]
DS -05 DSR-05	5	14.06[.554]	10.16[.400]
DS -04 DSR-04	4	11.52[.454]	7.62[.300]
DS -03 DSR-03	3	8.98[.354]	5.08[.200]
DS -02 DSR-02	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC(TYP.)			
(2,3,4,5,6,7,8,9,10,12, POS AVAIL)			



Dimensions : Millimetres (Inches)

DA




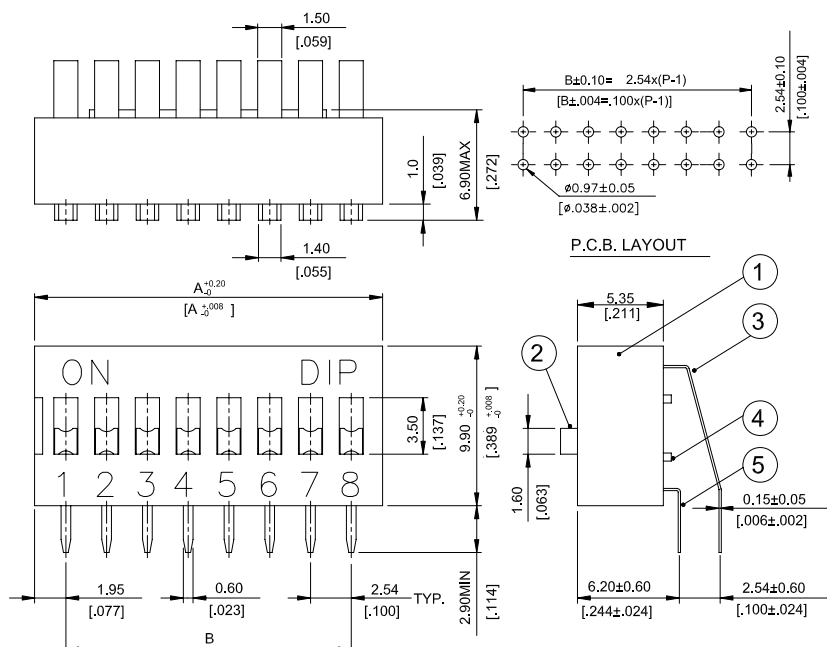


DA-12	12	31.84[1.254]	27.94[1.100]
DA-10	10	26.76[1.054]	22.86[.900]
DA-09	9	24.22[.954]	20.32[.800]
DA-08	8	21.68[.854]	17.78[.700]
DA-07	7	19.14[.754]	15.24[.600]
DA-06	6	16.60[.654]	12.70[.500]
DA-05	5	14.06[.554]	10.16[.400]
DA-04	4	11.52[.454]	7.62[.300]
DA-03	3	8.98[.354]	5.08[.200]
DA-02	2	6.44[.254]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B
SCHEMATIC(TYP.)			
(2,3,4,5,6,7,8,9,10,12, POS AVAIL)			

Dimensions : Millimetres (Inches)


DS, DP, DA Series

DP(L)

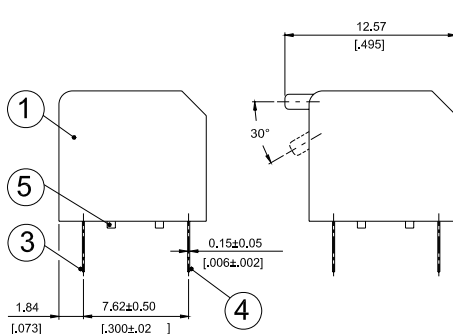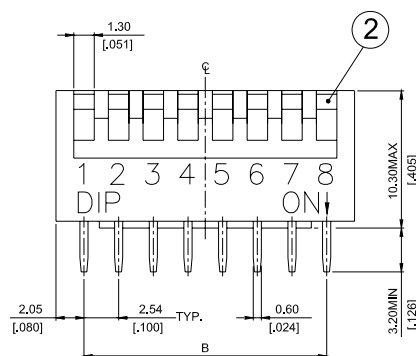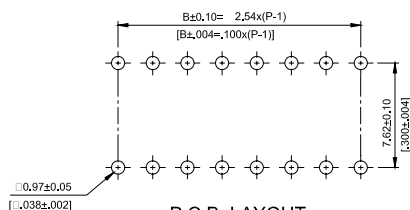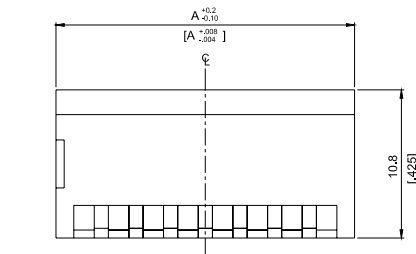

DP -12 DPL-12	12	32.04[1.261]	27.94[1.100]
DP -10 DPL-10	10	26.96[1.061]	22.86[.900]
DP -09 DPL-09	9	24.42[.961]	20.32[.800]
DP -08 DPL-08	8	21.88[.861]	17.78[.700]
DP -07 DPL-07	7	19.34[.761]	15.24[.600]
DP -06 DPL-06	6	16.80[.661]	12.70[.500]
DP -05 DPL-05	5	14.26[.561]	10.16[.400]
DP -04 DPL-04	4	11.72[.461]	7.62[.300]
DP -03 DPL-03	3	9.18[.361]	5.08[.200]
DP -02 DPL-02	2	6.64[.261]	2.54[.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

SCHEMATIC (TYP.)




Dimensions : Millimetres (Inches)

DP SERIES

DPL SERIES

HOW TO ORDER

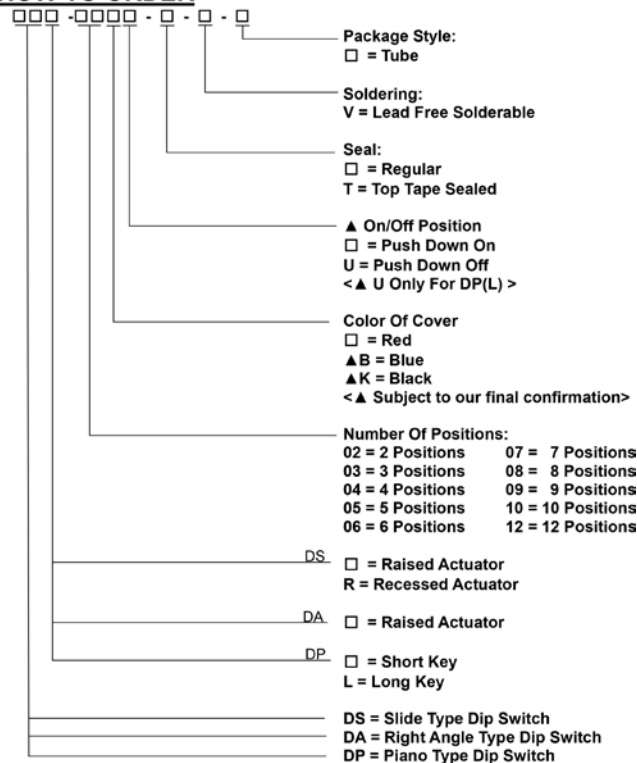

DS, DP, DA Series



Soldering Process

Keep all switch contacts in their "OFF" position for all operations.

Wave Soldering : Recommended temperature at 500°F (260°C) max. 5 seconds for through hole type

Hand Soldering : Use a soldering iron of 30 watts, controlled at 350°C approximately max 5 seconds.

Make sure switch is in "OFF" position during soldering process, or it will decrease the operating force and meanwhile increase the contact resistance.

Do not wash the switch body except top tape sealed type, which suitable for spray cleaning method from top of the s/w



Packing

Part Number	Number Per Tube	Part Number	Number Per Tube
DS(R)-02	72	DS(R)-02-T	70
DS(R)-03	51	DS(R)-03-T	50
DS(R)-04	40	DS(R)-04-T	39
DS(R)-05	32	DS(R)-05-T	32
DS(R)-06	27	DS(R)-06-T	28
DS(R)-07	24	DS(R)-07-T	24
DS(R)-08	21	DS(R)-08-T	21
DS(R)-09	19	DS(R)-09-T	19
DS(R)-10	17	DS(R)-10-T	17
DS(R)-12	14	DS(R)-12-T	14
DP(L)-02	70	DP(L)-02-T	65
DP(L)-03	50	DP(L)-03-T	49
DP(L)-04	39	DP(L)-04-T	39
DP(L)-05	32	DP(L)-05-T	32
DP(L)-06	27	DP(L)-06-T	27
DP(L)-07	24	DP(L)-07-T	24
DP(L)-08	21	DP(L)-08-T	21
DP(L)-09	19	DP(L)-09-T	19
DP(L)-10	17	DP(L)-10-T	17
DP(L)-12	14	DP(L)-12-T	14
DA-02	73	DA-02-T	70
DA-03	52	DA-03-T	50
DA-04	40	DA-04-T	39
DA-05	33	DA-05-T	32
DA-06	28	DA-06-T	28
DA-07	24	DA-07-T	24
DA-08	21	DA-08-T	21
DA-09	19	DA-09-T	19
DA-10	17	DA-10-T	17
DA-12	14	DA-12-T	14





DS, DP, DA Series

DS(R)

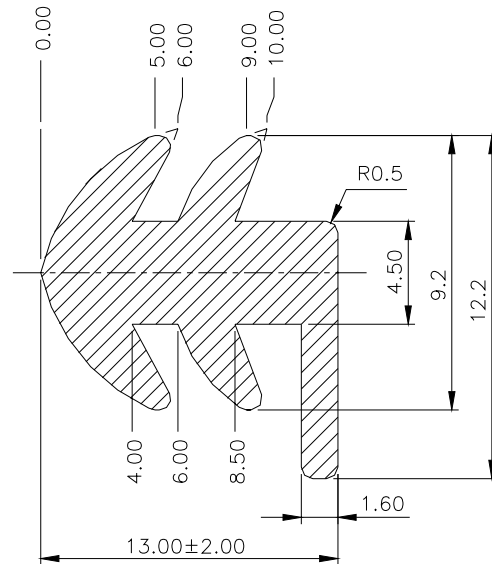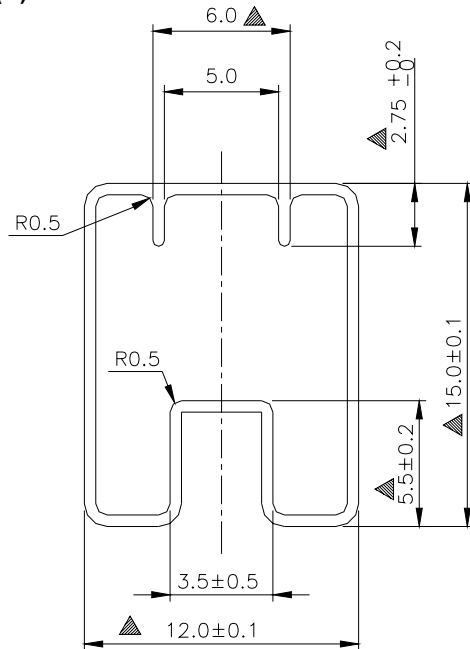

Dimensions : Millimetres


DP(L)

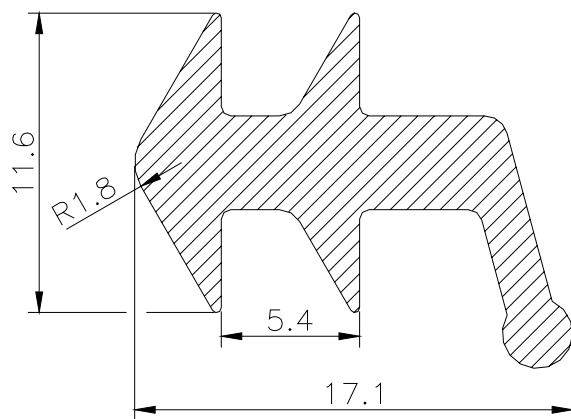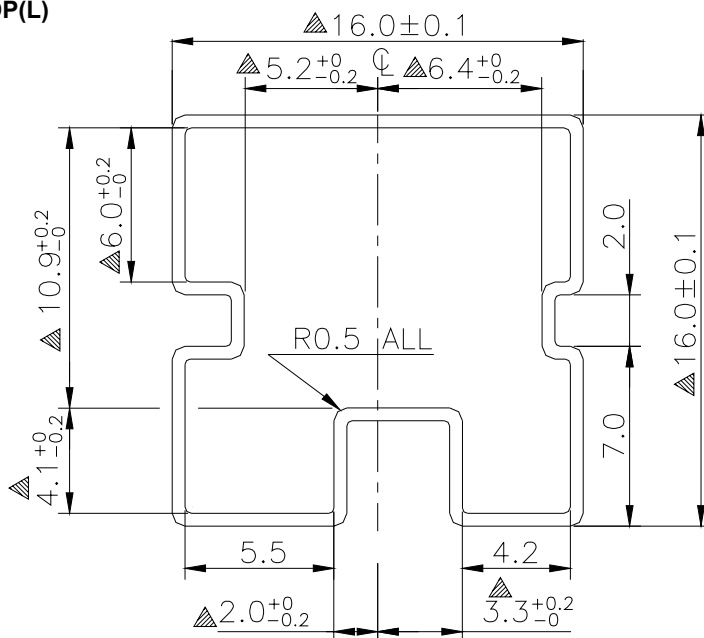

Dimensions : Millimetres

DS, DP, DA Series

DA

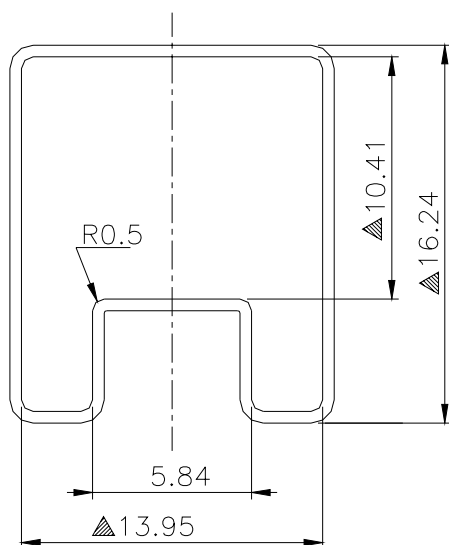

Dimensions : Millimetres

