

MCNDI Series


DIP Switches




**RoHS
Compliant**




MCNDI-02S




MCNDI-04S



MCNDI-06S



MCNDI-08S



MCNDI-10S

Features:

- Low profile for space saving
- Gold contact for high reliability
- Top tape type for washing process

Application:

- Industrial control
- Automatic machines control
- Telecommunication

Specifications:

Terminal Type	: Splay Terminal
Contact Rating	: 25mA, 24V DC
Contact Resistance	: 50mΩ max.
Insulation Resistance	: 100MΩ min. 500V DC
Dielectric Strength	: 500V AC/1 minute
Operating Force	: 1,000gf max.
Travel	: 1mm
Operating Life	: 2,000 cycles
Operating Temperature	: -20°C to +85°C
Storage Temperature	: -40°C to +85°C

Circuit:




02, 04, 06, 08 and 10 Position Available



MCNDI Series

DIP Switches

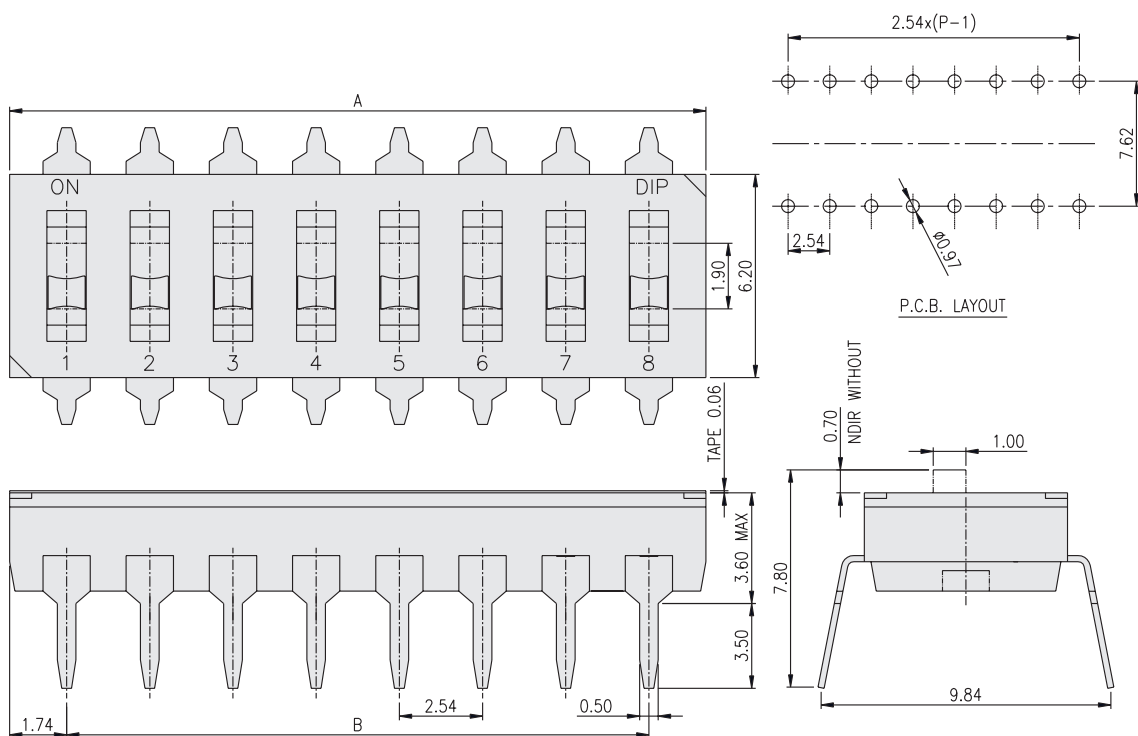

Dimensions : Millimetres

Part Number	No. of Position	Dimension A	Dimension B
MCNDI-02S	2	6.02	2.54
MCNDI-04S	4	11.1	7.62
MCNDI-06S	6	16.18	12.7
MCNDI-08S	8	21.26	17.78
MCNDI-10S	10	26.34	22.86

Part Number Table

Description	Part Number
Switch, DIL, Low, 2Way	MCNDI-02S
Switch, DIL, Low, 4Way	MCNDI-04S
Switch, DIL, Low, 6Way	MCNDI-06S
Switch, DIL, Low, 8Way	MCNDI-08S
Switch, DIL, Low, 10Way	MCNDI-10S

