



RF Cable Assembly

**RoHS
Compliant**

Specifications:

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC - 3GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Min.
Insulator Resistance	: 500MΩ Min.

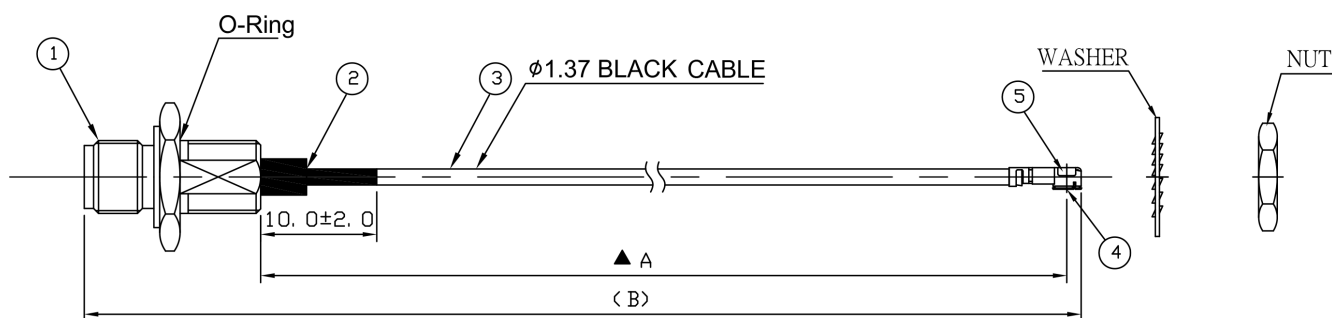

MOUNTING HOLE

1. IP67 RPSMA (rear lock) B/H Jack for OD1.37mm Cable (Nut × 1 ,Washer × 1)
2. Heat Shrink Tube F32 OD2.5mm L = 10mm Colour : Black
3. OD1.37mm Tin Plated Cable Black Jacket
4. U.FL-LP-088 Halogen Free Shell for ø1.37mm Cable
5. U.FL-LP-088 Contact for ø1.37mm Cable

Part Number Table

Description	Product Length A	Product Length B	VSWR	Insertion Loss	Part Number
IP67 RPSMA (rear lock) B/H - U.FL100mm	100mm	116.5mm	1.4:1 Max.	-0.7dB Max.	MC000798
IP67 RPSMA (rear lock) B/H - U.FL150mm	150mm	216.5mm	1.4:1 Max.	-0.9dB Max.	MC000799
IP67 RPSMA (rear lock) B/H - U.FL200mm	200mm	316.5mm	1.4:1 Max.	-1.0dB Max.	MC000800