


RF Cable Assembly

**RoHS
Compliant**

Specifications:

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC - 3GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Min.
Insulator Resistance	: 500MΩ Min.
Cable Colour	: Black

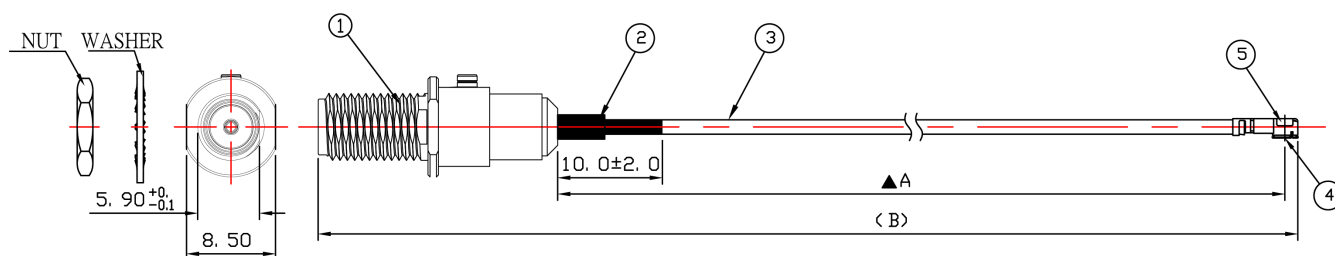

1. SMA B/H Jack to U.FL Switch for OD1.37mm Cable Indoor Only
2. Heat Shrink Tube F32 OD2.5mm L = 10mm Colour : Black
3. OD1.37mm Tin Plated Cable Black Jacket
4. U.FL-LP-088 Halogen Free Shell for OD1.37mm Cable
5. U.FL-LP-088 Contact for OD1.37mm Cable

Part Number Table

Description	Product Length A	Product Length B	VSWR	Insertion Loss	Part Number
SMA B/H Autoswitch (100mm U.FL)100mm	100mm	122.6mm	1.4:1 Max.	-0.8dB Max.	MC000807
SMA B/H Autoswitch (200mm U.FL)200mm	200mm	222.6mm	1.4:1 Max.	-1dB Max.	MC000808

www.element14.com
www.farnell.com
www.newark.com