



RF Cable Assembly

**RoHS
Compliant**

Specifications:

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC - 3GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Min.
Insulator Resistance	: 500MΩ Min.

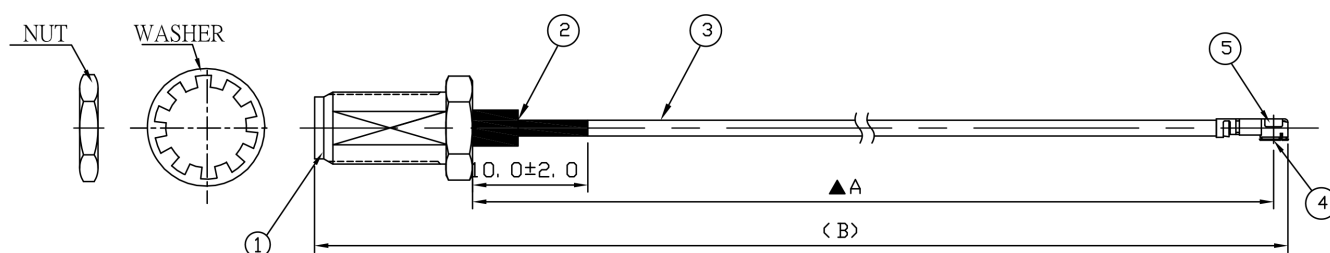

1. SMA B/H Jack for OD1.37mm Cable (Nut × 1, Washer × 1)
2. Heat Shrink Tube F32 OD2.5mm L = 10mm Colour : Black
3. OD1.37mm Tin Plated Cable Black Jacket
4. U.FL-LP-088 Halogen Free Shell for ø1.37mm Cable
5. U.FL-LP-088 Contact for ø1.37mm Cable

Part Number Table

Description	Product Length A	Product Length B	VSWR	Insertion Loss	Cable Colour	Part Number
SMA - U.FL (RED)100mm	100mm	115mm	1.4:1 Max.	-0.7dB Max.	Red	MC000809
SMA - U.FL (RED)150mm	150mm	165mm	1.4:1 Max.	-0.9dB Max.	Red	MC000810
SMA - U.FL (RED)200mm	200mm	215mm	1.4:1 Max.	-1.0dB Max.	Red	MC000811
SMA - U.FL (WHITE)100mm	100mm	115mm	1.4:1 Max.	-0.7dB Max.	White	MC000812
SMA - U.FL (WHITE)150mm	150mm	165mm	1.4:1 Max.	-0.9dB Max.	White	MC000813
SMA - U.FL (WHITE)200mm	200mm	215mm	1.4:1 Max.	-1.0dB Max.	White	MC000814
SMA - U.FL (BLUE)100mm	100mm	115mm	1.4:1 Max.	-0.7dB Max.	Blue	MC000815
SMA - U.FL (BLUE)150mm	150mm	165mm	1.4:1 Max.	-0.9dB Max.	Blue	MC000816
SMA - U.FL (BLUE)200mm	200mm	215mm	1.4:1 Max.	-1.0dB Max.	Blue	MC000817