



RF Cable Assembly

**RoHS
Compliant**

Specifications:

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC - 3GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Min.
Insulator Resistance	: 500MΩ Min.

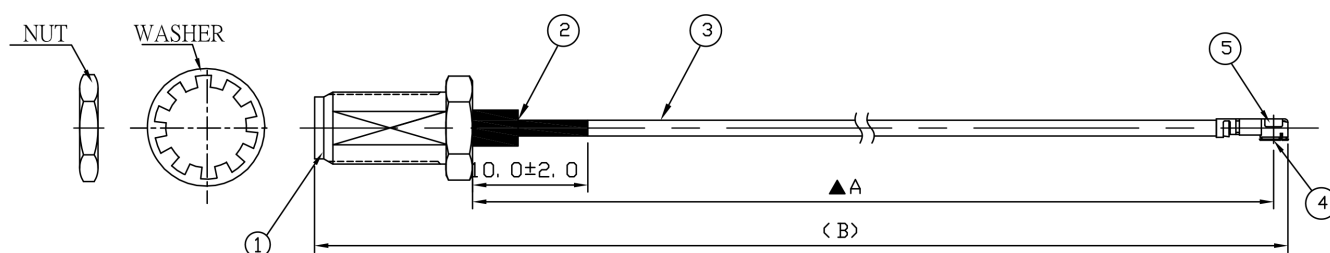

1. IP67 SMA B/H Jack for OD1.37mm Cable
2. Heat Shrink Tube F32 OD2.5mm L = 10mm Colour : Black
3. OD1.37mm Tin Plated Cable Black Jacket
4. U.FL-LP-088 Halogen Free Shell for $\phi 1.37$ mm Cable
5. U.FL-LP-088 Contact for $\phi 1.37$ mm Cable

Part Number Table

Description	Product Length A	Product Length B	VSWR	Insertion Loss	Cable Colour	Part Number
IP67SMA - U.FL (Red)100mm	100mm	115mm	1.4:1 Max.	-0.7dB	Red	MC000818
IP67SMA - U.FL (Red)150mm	150mm	165mm	1.4:1 Max.	-0.9dB	Red	MC000819
IP67SMA - U.FL (Red)200mm	200mm	215mm	1.4:1 Max.	-1.0dB	Red	MC000820
IP67SMA - U.FL (White)100mm	100mm	115mm	1.4:1 Max.	-0.7dB	White	MC000821
IP67SMA - U.FL (White)150mm	150mm	165mm	1.4:1 Max.	-0.9dB	White	MC000822
IP67SMA - U.FL (White)200mm	200mm	215mm	1.4:1 Max.	-1.0dB	White	MC000823
IP67SMA - U.FL (Blue)100mm	100mm	115mm	1.4:1 Max.	-0.7dB	Blue	MC000824
IP67SMA - U.FL (Blue)150mm	150mm	165mm	1.4:1 Max.	-0.9dB	Blue	MC000825
IP67SMA - U.FL (Blue)200mm	200mm	215mm	1.4:1 Max.	-1.0dB	Blue	MC000826