

200mm IP67 contact-sealed RP SMA-U.FL 1.37mm IP67 Sealed connector without antenna connected

multicomp


**RoHS
Compliant**



Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC ~ 6.0GHz
Working Voltage	: 170Vrms Max.
Dielectric Withstanding Voltage	: 750Vrms Max.
Insulator Resistance	: 1,000MΩ Min.

The material used in the construction of this cables do not contain, by mass, more than: 10% in total of aluminum, magnesium, titanium and zirconium and 7.5% in total of magnesium, titanium and zirconium.

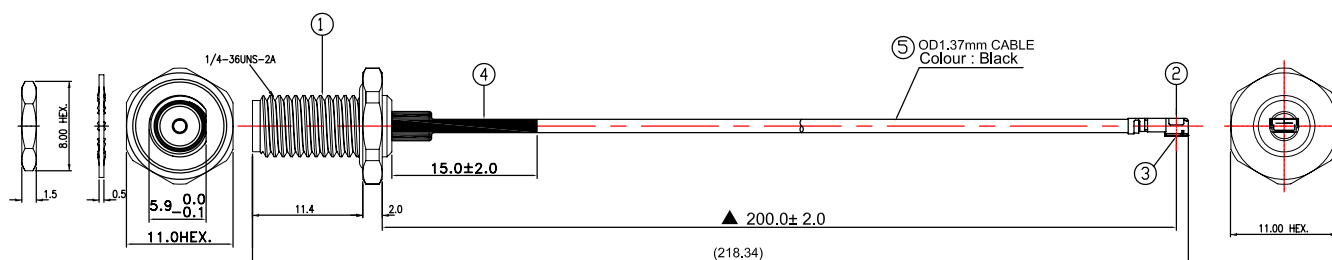

Dimensions : Millimetres

Specification	VSWR	Insertion Loss
DC~3.0GHz	1.4 : 1 Max	-1.0dB Max.

Item	Description	Qty.	U/M
1	Attachment : Nut-1PCs, Washer-1PCs, O-Ring-1PCs	1	EA
	RP-SMA contact sealed B/H Jack (D-Cut) Crimp Type for OD 1.37mm Cable		
2	U.FL-LP-088 Halogen Free Shell for OD 1.37mm Cable	1	EA
3	U.FL-LP-088 Contact for 1.37mm Cable	1	EA
4	Heat Shrink Tube F32 OD 2.5mm L = 15mm Colour : Black	1	EA
5	OD : 1.37mm Cable; Colour : Black	1	EA

Part Number Table

Description	Part Number
200mm IP67 contact-sealed RPSMA-U.FL (1.37mm)	MC001031

multicomp