

300mm SMA B/H - UFL

1.32mm


multicomp

**RoHS
Compliant**



Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC ~ 3.0GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Max.
Insulator Resistance	: 500MΩ Min.

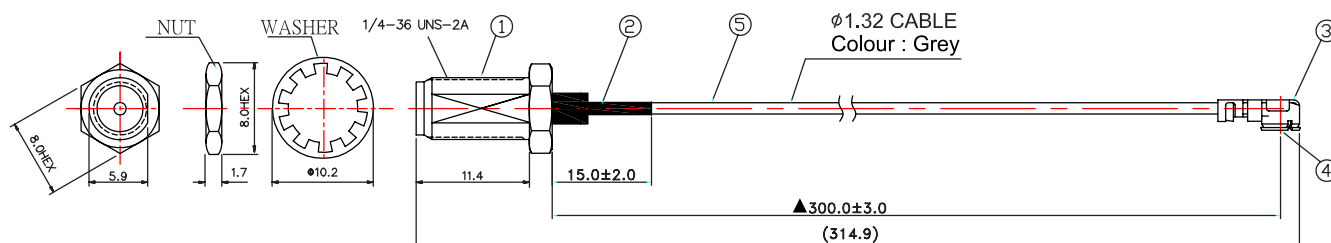

Dimensions : Millimetres

Specification	VSWR	Insertion Loss
DC~3.0GHz	1.4 : 1 Max	-1.7dB Max.

Item	Description	Qty.	U/M
1	SMA B/H Jack (T = 2.3mm) crimp	1	EA
2	Heat Shrink Tube F32 OD : 2.5mm, L = 15mm, Colour : Black	1	EA
3	U.FL-LP-066(02) Halogen Free Shell for OD: 1.32mm Cable	1	EA
4	U.FI-LP-066 Contact for OD : 1.32mm Cable	1	EA
5	OD : 1.32mm Cable Colour : Grey	1	EA

Part Number Table

Description	Part Number
300mm SMA B/H - UFL (1.32mm)	MC001038

multicomp