

100mm RPSMA B/H - UFL

1.32mm


multicomp

**RoHS
Compliant**



Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC ~ 3.0GHz
Working Voltage	: 60Vrms Max.
Dielectric Withstanding Voltage	: 200Vrms Max.
Insulator Resistance	: 500MΩ Min.

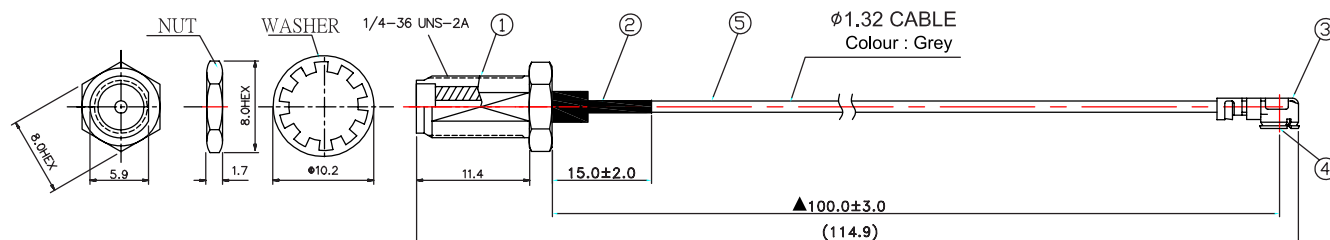

Dimensions : Millimetres

Specification	VSWR	Insertion Loss
DC~3.0GHz	1.4 : 1 Max	-0.8dB Max.

Item	Description	Qty.	U/M
1	RP-SMA B/H Jack (T=2.3mm) crimp for 1.37mm	1	EA
2	Heat Shrink Tube F32 OD:2.5mm; L=15mm Colour : Black	1	EA
3	U.FL-LP-066(02) Halogen Free Shell for, OD 1.32mm cable	1	EA
4	U.FL-LP-066 Contact for OD 1.32mm Cable	1	EA
5	OD 1.32mm Cable Colour : Grey	1	EA

Part Number Table

Description	Part Number
100mm RPSMA B/H - UFL (1.32mm)	MC001042

multicomp