

# 200mm RPSMA B/H - UFL

## 1.32mm


**multicomp**

**RoHS  
Compliant**



### Electrical Performance:

|                                 |                |
|---------------------------------|----------------|
| Impedance                       | : 50Ω          |
| Frequency Range                 | : DC ~ 3.0GHz  |
| Working Voltage                 | : 60Vrms Max.  |
| Dielectric Withstanding Voltage | : 200Vrms Max. |
| Insulator Resistance            | : 500MΩ Min.   |

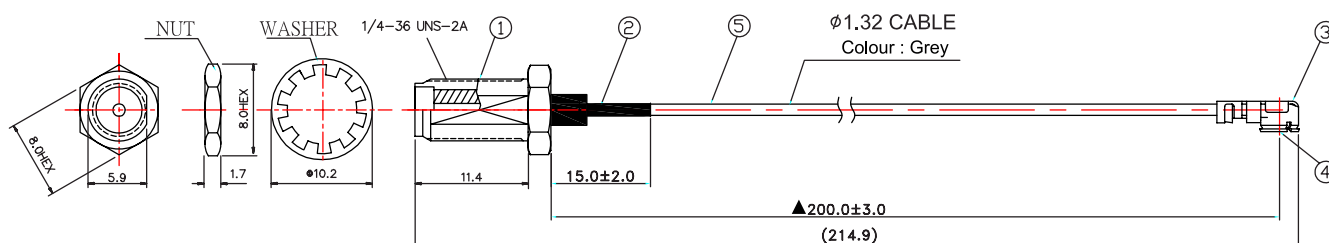

Dimensions : Millimetres

| Specification | VSWR        | Insertion Loss |
|---------------|-------------|----------------|
| DC~3.0GHz     | 1.4 : 1 Max | -1.3dB Max.    |

| Item | Description                                             | Qty. | U/M |
|------|---------------------------------------------------------|------|-----|
| 1    | RP-SMA B/H Jack (T=2.3mm) crimp for 1.37mm              | 1    | EA  |
| 2    | Heat Shrink Tube F32 OD:2.5mm; L=15mm Colour : Black    | 1    | EA  |
| 3    | U.FL-LP-066(02) Halogen Free Shell for, OD 1.32mm cable | 1    | EA  |
| 4    | U.FL-LP-066 Contact for OD 1.32mm Cable                 | 1    | EA  |
| 5    | OD 1.32mm Cable Colour : Grey                           | 1    | EA  |

### Part Number Table

| Description                    | Part Number |
|--------------------------------|-------------|
| 200mm RPSMA B/H - UFL (1.32mm) | MC001043    |

**multicomp**