



IP67 RPSMA Bulkhead Jack - UFL

**RoHS
Compliant**

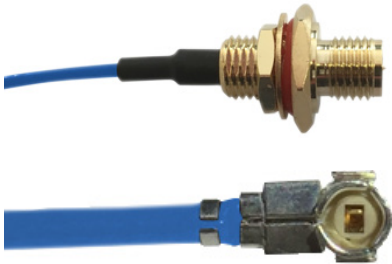


Electrical Performance

| | |
|---------------------------------|-----------------|
| Impedance | : 50Ω |
| Frequency Range | : DC ~ 6 GHz |
| Working Voltage | : 60 Vrms Max. |
| Dielectric Withstanding Voltage | : 200 Vrms Max. |
| Insulator Resistance | : 500MΩ Min. |

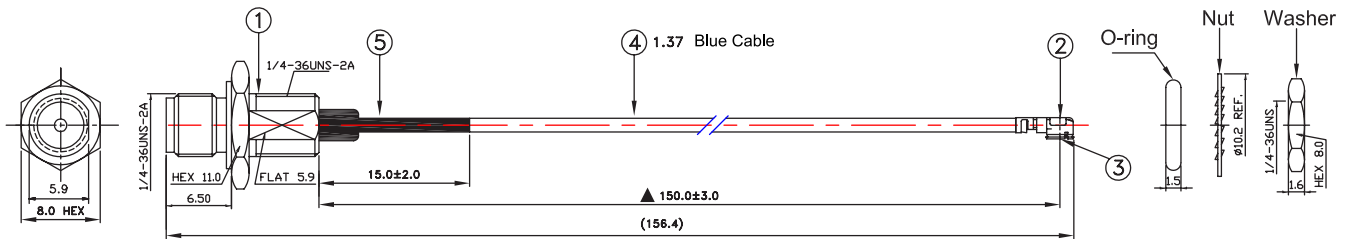

Dimensions : Millimetres

| | |
|----------------|--------------|
| Specification | DC ~ 6 GHz |
| Vswr | 1.65 :1Max. |
| Insertion Loss | -1.2 dB Max. |



Scale 4:1

Recommended
Mounting Hole

| No. | Description | Qty. |
|-----|---|------|
| 1. | RP-SMA Rear lock B/H Jack Crimp for OD 1.37 cable conn. | 1 |
| 2. | U.FL-LP-088 Halogen Free Shell for 1.37mm cable | 1 |
| 3. | U.FL-LP-088 Contact for 1.37mm Cable | 1 |
| 4. | 1.37 Blue Cable | 1 |
| 5. | Heat Shrink Tube F32 2.5mm L=15mm, Colour : Black | 1 |

Part Number Table

| Description | Part Number |
|---|-------------|
| Blue 150mm IP67 RPSMA Bulkhead Jack - UFL | MC001502 |