

# Sounders and Buzzers

## Piezo Transducer

pro-SIGNAL

RoHS  
Compliant



### Features

- Black in colour
- Not wave solderable or washable
- Lead wire: UL1571 32#
- Housing material: ABS


### Specifications

Rated Voltage	: 10Vp-p (Vp-p square wave)
Operating Voltage	: 1Vp-p - 30Vp-p
Rated Current*	: ≤5mA
Sound Output at 3200Hz at 10cm*	: ≥80dB
Resonant Frequency*	: 3,200Hz ±500
Capacitance at 120Hz	: 11000 ±30% pF
Operating temperature	: -20°C to +60°C
Storage temperature	: -30°C to +70°C
Weight	: 1g

\*Value applying at rated voltage (AC)

Requires additional electronic circuitry to operate as a sounder

### Diagram

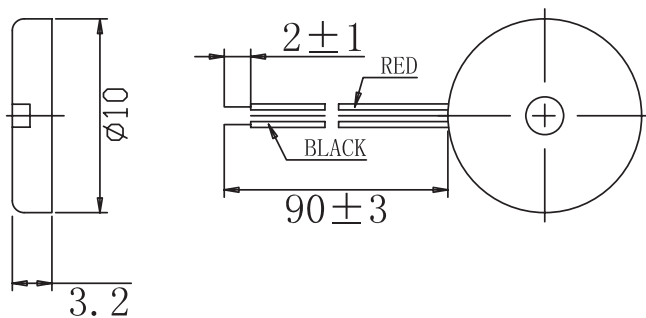

Dimensions : Millimetres  
Tolerance: ±0.5mm

### Part Number Table

Description	Part Number
Buzzer, Piezo, 1-30VP-P, 80dB, 90mm Leads	ABT-459-RC

pro-SIGNAL