

# Sounders and Buzzers

## Piezo Indicator

pro-SIGNAL

RoHS  
Compliant



### Features

- Black in colour
- With internal drive circuit
- Housing material: Noryl
- Pin material: Red copper
- Wave solder and wash not allowed


### Specifications

Rated Voltage	: 12V DC
Operating Voltage	: 3 ~ 20V DC
Rated Current*	: ≤15mA
Sound Output at 30cm*	: ≥95dB
Resonant Frequency	: 3,400 ±500Hz
Tone	: Continuous
Operating Temperature	: -20°C to +70°C
Storage Temperature	: -40°C to +85°C
Weight	: 4g

\*Value applying at rated voltage (DC)

All data at 25°C unless otherwise specified

### Diagram

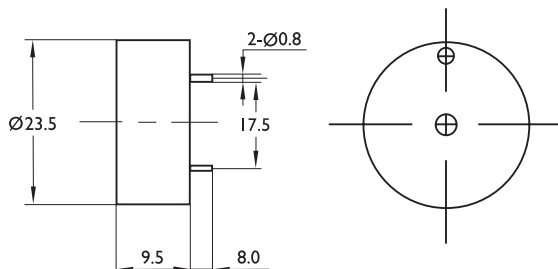

Dimensions : Millimetres  
Tolerance: ±0.5mm

### Part Number Table

Description	Part Number
Buzzer, Piezo, 3 - 20V DC, 95dB, 23.5mm DIA.	ABI-051-RC

pro-SIGNAL