

Sounders and Buzzers

Electro Mechanical Buzzer

pro-SIGNAL

RoHS
Compliant



Features

- Grey in colour
- With internal drive circuit
- Housing material: Noryl
- Pin material: Red copper
- Wave solder and wash not allowed


Specifications

| | |
|-----------------------|------------------|
| Rated Voltage | : 12V DC |
| Operating Voltage | : 5 ~ 18V DC |
| Rated Current* | : ≤50mA |
| Sound Output at 30cm* | : ≥100dB |
| Resonant Frequency | : 2,800 ±500Hz |
| Tone | : Continuous |
| Operating Temperature | : -30°C to +70°C |
| Storage Temperature | : -40°C to +85°C |
| Weight | : 12g |

*Value applying at rated voltage (DC)

All data at 25°C unless otherwise specified

Diagram

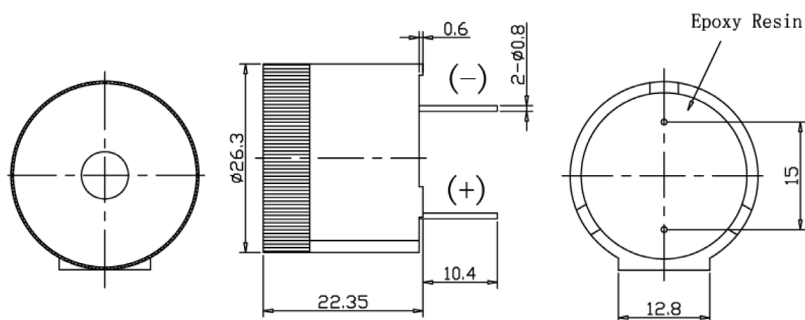

Dimensions : Millimetres

Tolerance: ±0.5mm

Part Number Table

| Description | Part Number |
|--|-------------|
| Electro Mechanical Buzzer, 5 - 18V DC, 100dB | ABI-052-RC |

pro-SIGNAL