

# Sounders and Buzzers

## Siren - 102dB at 12V DC

pro-SIGNAL

RoHS  
Compliant



### Features


- Black in colour
- With internal drive circuit
- Has screw holes for mounting
- Housing material: ABS
- Lead wire: UL1007 AWG26

### Specifications

Rated Voltage	: 12V DC
Operating Voltage	: 6 ~ 14V DC
Rated current*	: ≤70mA (typical 50mA)
Sound Output at 30cm*	: ≥102dB
Resonant Frequency	: 2,000Hz - 3,500Hz
Tone	: Siren - dual tone
Operating Temperature	: -10°C to +60°C
Storage Temperature	: -40°C to +85°C
Weight	: 27g

\*Value applying at rated voltage (DC)  
All data at 25°C unless otherwise specified

### Diagram

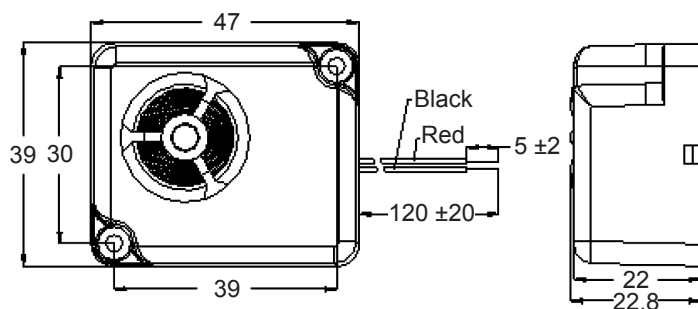

Dimensions : Millimetres  
Tolerance: ±0.5mm

### Part Number Table

Description	Part Number
Electro Mechanical Buzzer, 5 - 18V DC, 100dB	ABI-053-RC

pro-SIGNAL