

Speaker

pro-SIGNAL


RoHS
Compliant




Specifications

Cone Material	: Mylar
Rated Impedance	: $8 \pm 15\% \Omega$
Nominal Power	: 0.5W
Maximum Power	: 0.8W
Resonant Frequency	: $600 \pm 25\% \text{Hz}$
Frequency Range	: F 0 - 6,000Hz
Sound Pressure Level at 0.1W/0.1m	: $96 \pm 3\text{dB}$
Magnet Material	: Nd-Fe-B
Magnet Size	: $12.5\text{mm} \times 1.5\text{mm}$
Operating Temperature	: -20°C to $+60^\circ\text{C}$
Storage Temperature	: -30°C to $+60^\circ\text{C}$
Weight	: 9.2g

Frequency Curve

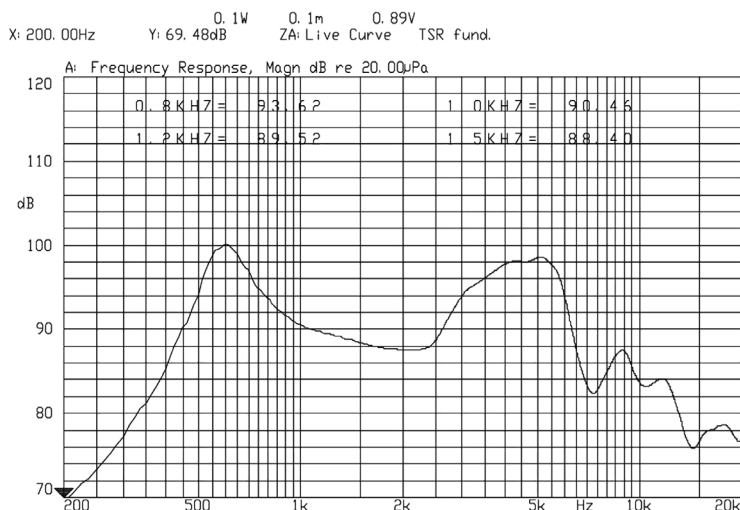

Diagram

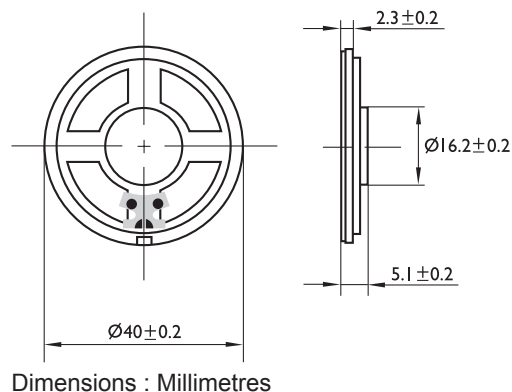

Part Number Table

Description	Part Number
Mylar Speaker, 40mm DIA, 8Ω, 0.8W	ABS-220-RC

pro-SIGNAL