

4mm Banana Plug to 4mm Banana Plug Lead



**RoHS
Compliant**



Characteristics

Electrical Safety

: According to EN / IEC 61010-031:2008 : 1000 V CAT II / 1000 V CAT III / 600 V CAT IV, reinforced insulation, 12 A (at +40 °C). These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are :
Pollution degree, 1 or 2 ;
Relative humidity, 80 % maximum for temperatures up to 31°C decreasing linearly to 50 % relative humidity at +40°C
Temperature range, +5°C to +40°C
Indoor use ; and Altitude, 2000 m maximum.
According to EN / IEC 60529 : IP2X (touchproof).

Operating Temperature

: -20°C to +80°C

Materials


: Conductors: Nickel-coated brass and red annealed copper.
Wire jackets: Silicone. Insulators and lantern contact spring

Colour

: Red, Black, Blue, Green & Yellow

Overall Length

: 1.5 meter (150cm)

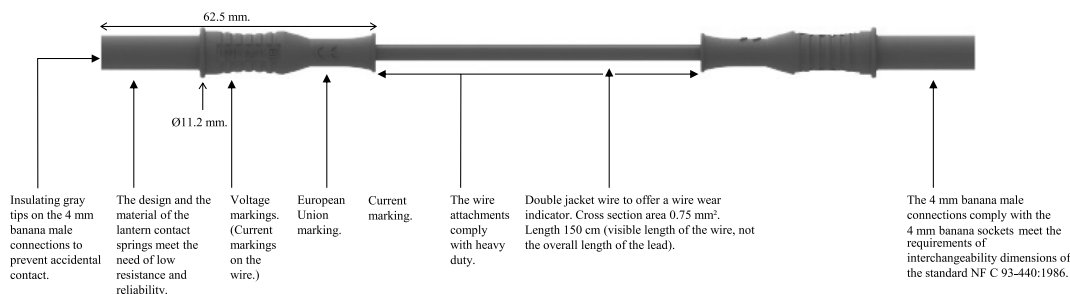

Part Number Table

Description	Colour	Part Number
Straight 4mm Banana Male Plug to Straight 4mm Banana Male Plug Lead	Red	76-016
	Black	76-1400
	Blue	76-1402
	Green	76-1404
	Yellow	76-1406

