

Right-Angle 4mm Male Banana Plug to Right-Angle 4mm Male Banana Plug Lead



**RoHS
Compliant**

Applications

To connect to devices with 4mm banana sockets on the front face.
General purpose electric testing, controlling and measuring.

Characteristics

Electrical Safety

: According to EN / IEC 61010-031:2008 : 1000V CAT II / 1000V CAT III / 600 V CAT IV, reinforced insulation, 12A (at +40°C).

These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are:

Pollution degree, 1 or 2; Relative humidity, 80% maximum for temperatures up to 31°C decreasing linearly to 50% relative humidity at +40°C

Temperature range, +5°C to +40°C, Indoor use ; Altitude, 2000 m maximum.

According to EN / IEC 60529 : IP2X (touchproof).

Operating Temperature

: -20°C to +80°C

Materials

: Conductors: Nickel-coated brass and red annealed copper.


Wire jackets: PVC or silicone. Insulators and lantern contact spring

Colour

: Red and Black

Overall Length

: 1 meter (100cm) & 1.5 meter (150cm)

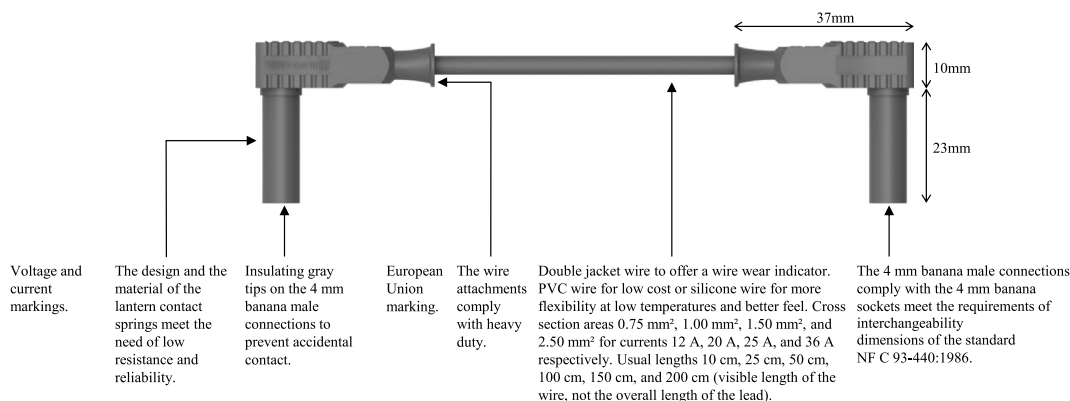

Part Number Table

Description	Length	Colour	Part Number
Right-Angle 4mm Male Banana Plug to Right-Angle 4mm Male Banana Plug Lead	1m	Red	76-022
		Black	76-023
	1.5m	Red	76-024
		Black	76-025

