

4mm Male Banana Plug to 4mm Male Banana Plug Lead



**RoHS
Compliant**



Characteristics

Electrical Safety

: According to EN / IEC 61010-031:2008 : 1000 V CAT II / 1000 V CAT III / 600 V CAT IV, reinforced insulation, 28A (at +40°C).

These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are : Pollution degree, 1 or 2; Relative humidity, 80% maximum for temperatures up to 31°C decreasing linearly to 50% relative humidity at +40°C, Temperature range, +5°C to +40°C Indoor use ; Altitude, 2000 m maximum.

According to EN / IEC 60529 : IP2X (touchproof).

Operating Temperature

: -20°C to +80°C

Materials


: Conductors: Nickel-coated brass and red annealed copper.
Wire jackets: Silicone. Insulators and lantern contact spring

Colour

: Red and Black

Overall Length

: 1 meter (100cm)

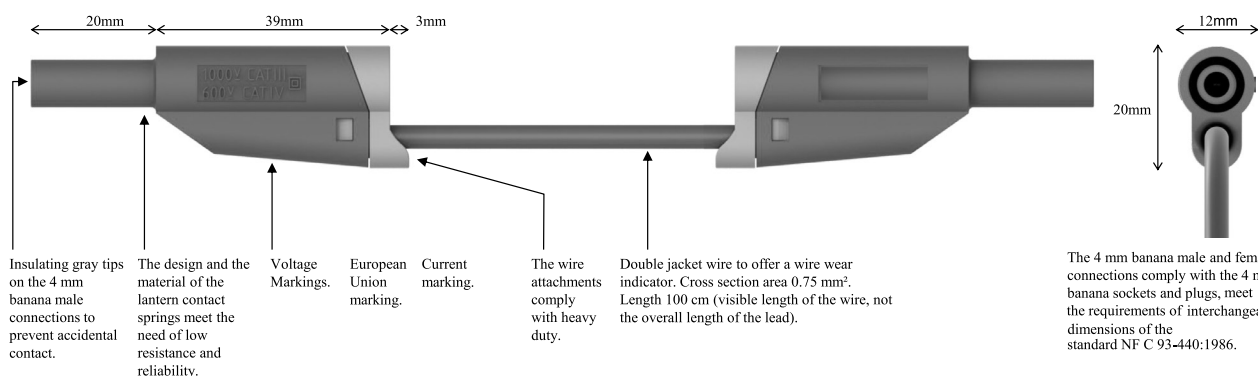

Part Number Table

Description	Length	Colour	Part Number
Stacking 4mm Male Banana Plug to Stacking 4mm Male Banana Plug Lead	1m	Red	76-026
		Black	76-027

