


Terminal Block



**RoHS
Compliant**





Specifications

Current Rating	: 20Amp 300V
Insulation withstands Volt	: AC2000V min
Insulation Resistance	: >2,000MΩ DC500V
Operation Temperature	: -40°C to +120°C
Wire Range	: 14 AWG to 22 AWG
Wire Strip length	: 8mm to 9mm
Screw Torque	: 12lb-inch

Diagram

New Part Number Table:-

Description	Poles	A(mm)	B(mm)	Part Number
Terminal Blocks	3	50	29	T34-RM1103
Terminal Blocks	6	78.5	47.5	T34-RM1106
Terminal Blocks	2	40.5	9.5	T34-RM1102
Terminal Blocks	4	59.5	28.5	T34-RM1104
Terminal Blocks	8	97.5	66.5	T34-RM1108
Terminal Blocks	10	116.5	85.5	T34-RM1110
Terminal Blocks	5	69	38	T34-RM1105
Terminal Blocks	12	135.5	104.5	T34-RM1112

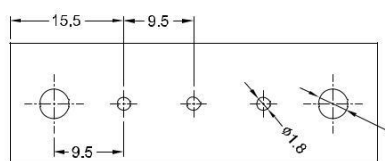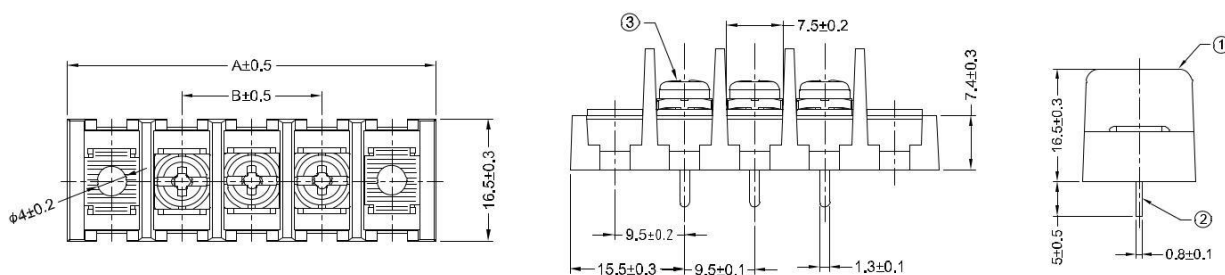

PCB Layout

Item	Material		Plating/Finish
1	Insulating Body	PBT (UL94V-0), Black	-
2	Terminal	Brass	Tin Plate
3	Screw	Steel	Ni Plate

Dimensions : Millimetres

Old Part Number Table:-

Description	Poles	A (mm)	B (mm)	Part Number
Terminal Blocks	6	78.5	47.5	MC001354
	8	97.5	66.5	MC001355
	3	50	19	MC001351
	10	116.5	85.5	MC001356
	4	59.5	28.5	MC001352
	5	69	38	MC001353
	12	135.5	104.5	MC001357
	2	40.5	9.5	MC001350

multicomp