

Non-Stripping Multi-Connection Wire Connector



**RoHS
Compliant**



Features:

- No need to remove wire insulation
- No need to splice the wires
- No need for taping
- Water and dust resistant (IP 33)
- Absolutely free from electric shock
- As easy as 1-2-3 operation
- Accommodate all kinds of electric wires

Technical Specification:

mm ²	0.75
AWG	19 ~ 17
Connection Method	Caged wire clamps without stripping & splicing
Number of wire	1 or 2
Connection Method	Auto strip and connection in connector
Wire type	Solid and/or Stranded
Waterproof status(IP)	IP 33
Measured voltage EN(V)	600
Connector type	I Type
Measured shock voltage (kV)	6
Connected Loss (Ohm)	0.001
Maximum Current (A)	10
Tensile strength (NT)	77
Weight (g)	1
Colour	Charcoal
Height (a : mm)	6
Width (b : mm)	6
Width (T-type) (d : mm)	
Depth (c : mm)	30
Strip length from (mm)	7
Strip length to (mm)	9
Connection points	4
Metal thickness	0.4
HS code	853690







Non-Stripping Multi-Connection Wire Connector



Connection Diagram

Product	I-2
mm ²	0.75
Wire Type	Solid or Stranded
Number of Wire	1 : 1 Connection
Picture	
Diagram	

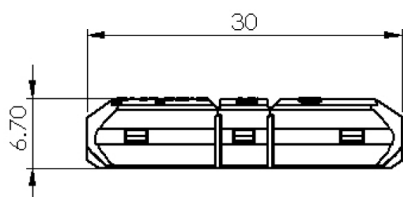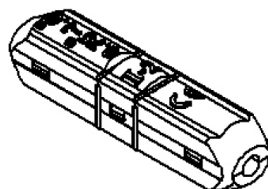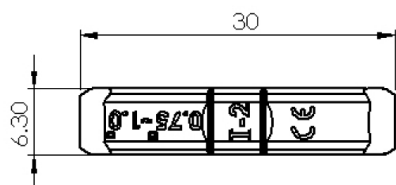


Dimensions : Millimetres



Non-Stripping Multi-Connection Wire Connector



Assembly Instructions:

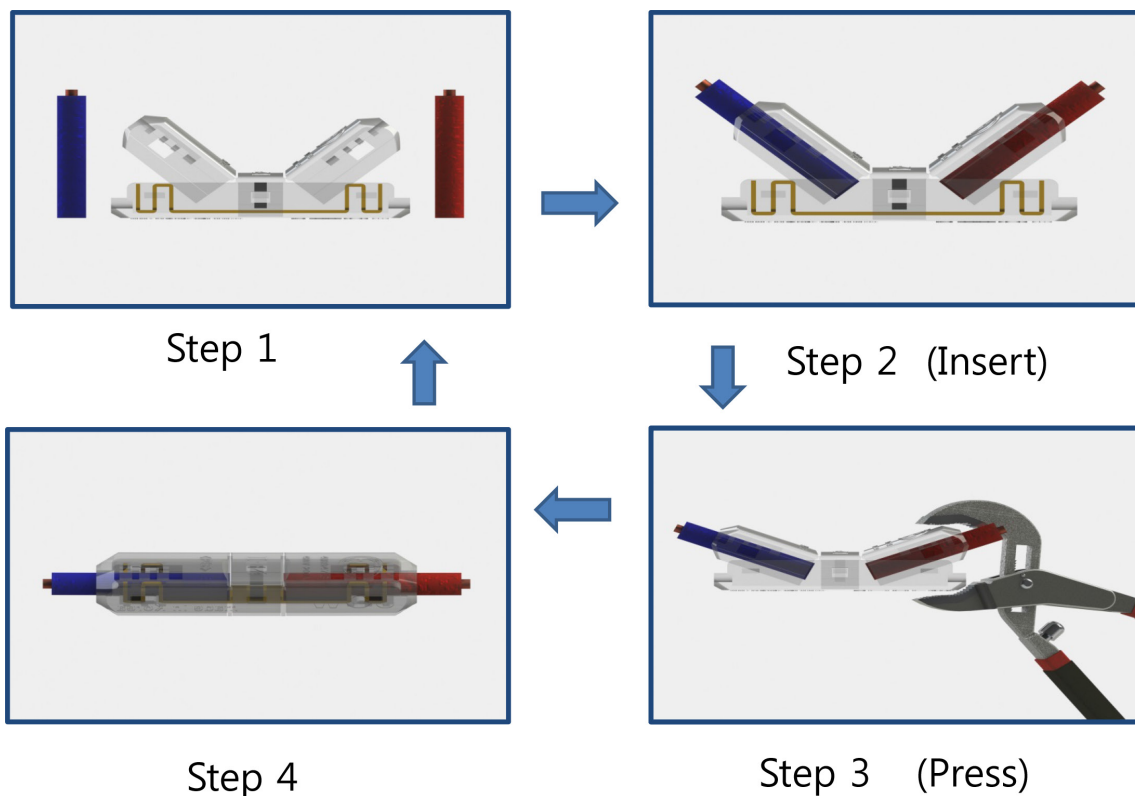

Part Number Table

Description	Part Number
Non-Stripping, Multi-Connection Wire Connector	MCI002141S

