

Non-Stripping Multi-Connection Wire Connector



RoHS
Compliant



Features:

- No need to remove wire insulation
- No need to splice the wires
- No need for taping
- Water and dust resistant (IP 33)
- Absolutely free from electric shock
- As easy as 1-2-3 operation
- Accommodate all kinds of electric wires

Technical Specification:

mm ²	2.5
AWG	13 ~ 12
Connection Method	Caged wire clamps without stripping & splicing
Number of wire	1 or 2
Connection Method	Auto strip and connection in connector
Wire type	Solid and/or Stranded
Waterproof status(IP)	IP 33
Measured voltage EN(V)	600
Connector type	T Type
Measured shock voltage (kV)	12
Connected Loss (Ohm)	0.0001
Maximum Current (A)	20
Tensile strength (NT)	263
Weight (g)	3.3
Colour	Green
Height (a : mm)	7.7
Width (b : mm)	7.7
Width (T-type) (d : mm)	18
Depth (c : mm)	37
Strip length from (mm)	10
Strip length to (mm)	13
Connection points	9
Metal thickness	0.5
HS code	853690




Non-Stripping Multi-Connection Wire Connector



Connection Diagram:

Product	T-4
mm ²	2.5
Wire Type	Solid or Stranded
Number of Wire	1 : 1 Connection
Picture	
Diagram	

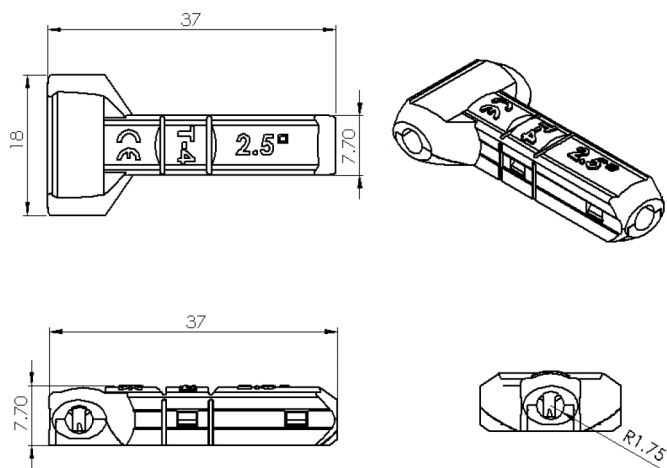


Dimensions : Millimetres



Non-Stripping Multi-Connection Wire Connector



Assembly Instructions:

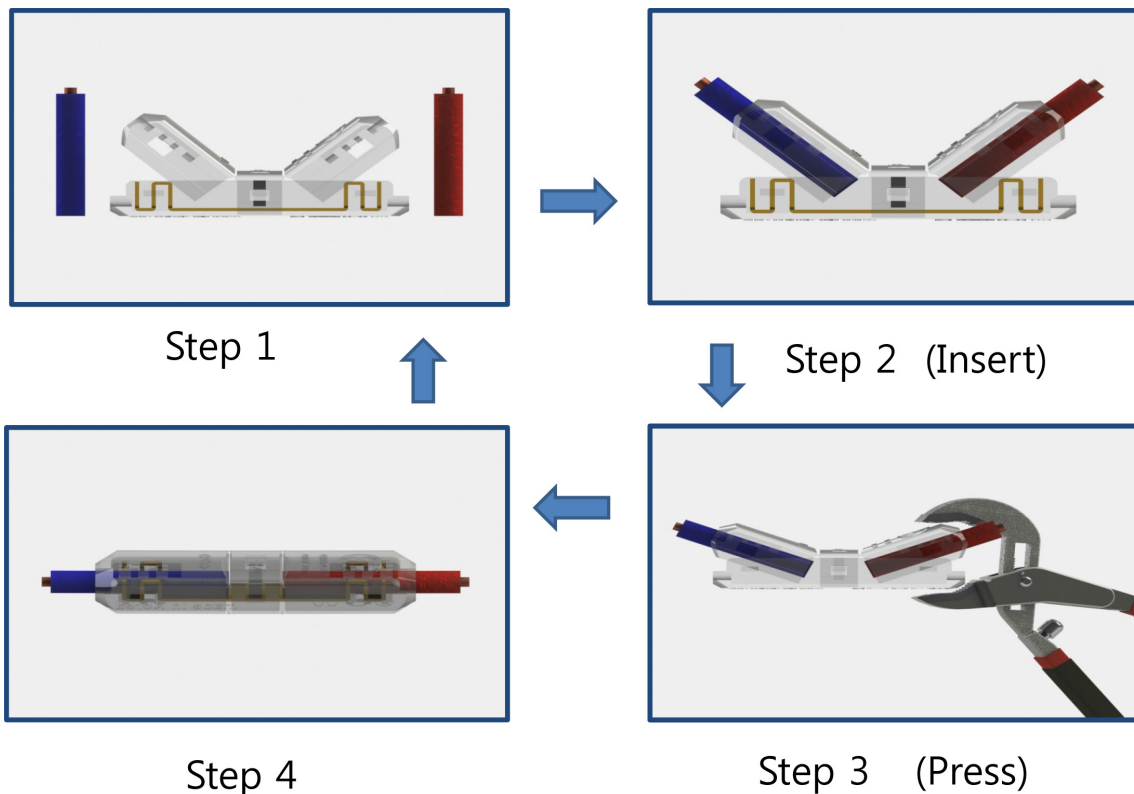

Part Number Table

Description	Part Number
Non-Stripping, Multi-Connection Wire Connector	MCT004141S

