


Terminal Block

**RoHS
Compliant**



Specifications

Current Rating	: 20Amp 600V
Wire Range	: 12 AWG to 22 AWG
Stripped Length	: 4.5mm to 5.5mm
Continuous Working Temp.	: 105°C Max.
Operation Temperature	: -30°C to +85°C
Insulation Withstands Volt	: AC2000V min
Insulation Resistance	: >2,000MΩ DC500V

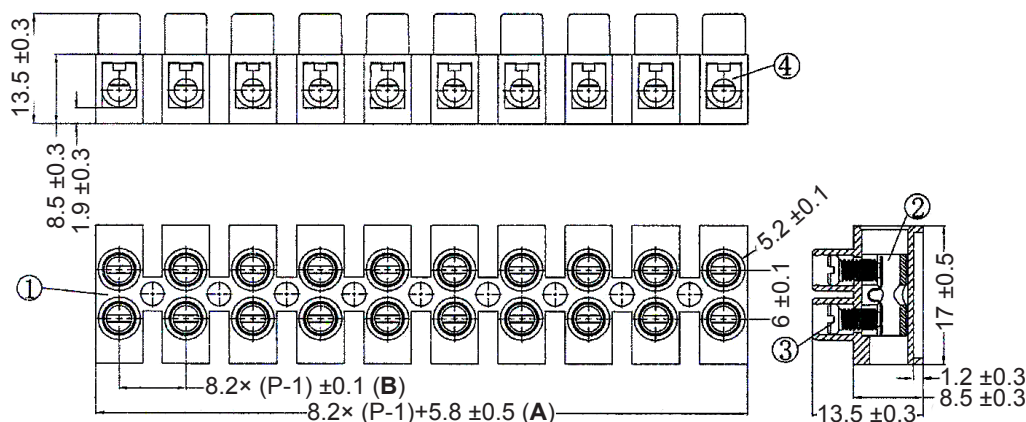

Dimensions : Millimetres

Part Number	A	B
MC001819	14mm	8.2mm
MC001820	22.2mm	16.4mm
MC001821	30.4mm	24.6mm
MC001822	79.6mm	73.8mm

No.	Material		Plating/Finish
1	Insulating Body	PA66(UL94-V2)	-
2	Wire Protector	SUS301	-
3	Screw	Steel	Zinc Plate
4	Cage Clamp	Brass	Ni Plate

Part Number Table

Description	Part Number
H Type Dual-Pole Terminal Block, 20A, 600V, 8.2mm, 2×2 Poles, White	MC001819
H Type Dual-Pole Terminal Block, 20A, 600V, 8.2mm, 3×2 Poles, White	MC001820
H Type Dual-Pole Terminal Block, 20A, 600V, 8.2mm, 4×2 Poles, White	MC001821
H Type Dual-Pole Terminal Block, 20A, 600V, 8.2mm, 10×2 Poles, White	MC001822