




Terminal Block

**RoHS
Compliant**



Specifications

Current Rating	: 30Amp 600V
Wire Range	: 12 AWG to 22 AWG
Continuous Working Temp.	: 105°C Max.
Operation Temperature	: -30°C to +105°C
Insulation Withstands Volt	: AC2000V min
Insulation Resistance	: >2,000MΩ DC500V

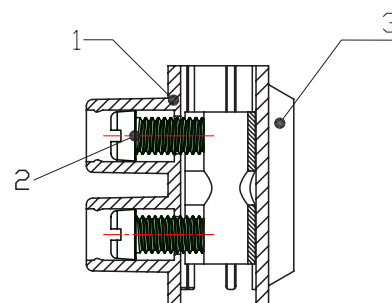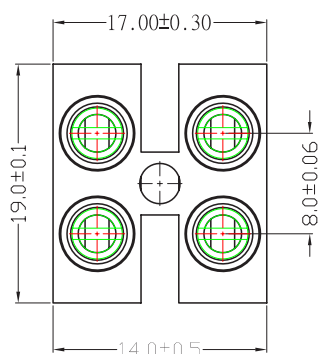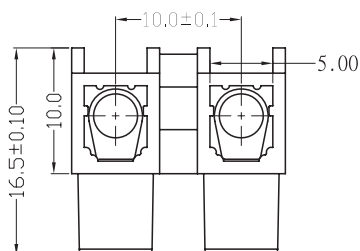

Dimensions : Millimetres

Part Number	Pinch	Poles	L
MC001823	10mm	2	17mm
MC001824		3	27mm
MC001825		4	37mm
MC001826		10	97mm

No.	Material		Plating/Finish
1	Insulating Body	PA66(UL94-V0)	-
2	Terminal Block	Brass	Tin Plate
3	Screw	Steel	Zinc Plate

Part Number Table

Description	Part Number
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 2×2 Poles, White	MC001823
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 3×2 Poles, White	MC001824
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 4×2 Poles, White	MC001825
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 10×2 Poles, White	MC001826