


Terminal Block

**RoHS
Compliant**



Specifications

Current Rating	: 30Amp 600V
Wire Range	: 10 AWG to 22 AWG
Stripped Length	: 5.5mm to 6.5mm
Continuous Working Temp.	: 85°C Max.
Operation Temperature	: -30°C to +85°C
Insulation Withstands Volt	: AC2000V min
Insulation Resistance	: >2,000MΩ DC500V

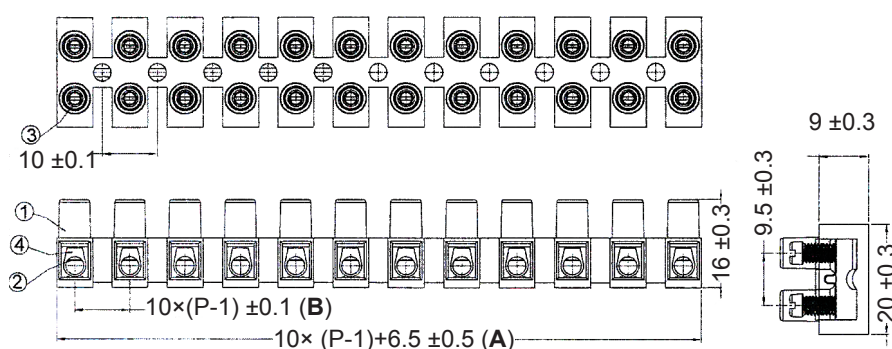

Dimensions : Millimetres

Part Number	A	B
MC001827	16.5mm	10mm
MC001828	26.5mm	20mm
MC001829	36.5mm	30mm
MC001830	96.5mm	90mm

No.	Material		Plating/Finish
1	Insulating Body	PA66(UL94-V2)	-
2	Wire Protector	SUS301	-
3	Screw	Steel	Zinc Plate
4	Cage Clamp	Brass	Ni Plate

Part Number Table

Description	Part Number
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 2×2 Poles, White	MC001827
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 3×2 Poles, White	MC001828
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 4×2 Poles, White	MC001829
H Type Dual-Pole Terminal Block, 30A, 600V, 10mm, 10×2 Poles, White	MC001830