

Illuminated Emergency Stop Switches, 1NO+1NC

multicomp

**RoHS
Compliant**



Specifications

Mechanical Life	: >0.25 million operations
Electrical Life	: >0.1 million operations
Rated Insulation Voltage	: 600V
Rated Thermal Current	: 10A
Insulation Resistance	: 100MΩ
Dielectric Strength	: 2,500V AC, 1 minute
Panel Thickness	: 0.8mm to 6mm
Degree of protection	: IP65
Storage Temperature	: -45°C to +85°C
Operating Temperature	: -25°C to +55°C

Contact Ratings


Rated Insulation Voltage		600V			
Rated Thermal Current		10A			
Operating Voltage		24V	120V	240V	380V
AC	Resistive Load (AC-12)	10A	10A	6A	2A
50/60 Hz	Inductive Load (AC-15)	10A	6A	3A	1.9A
DC	Resistive Load (DC-12)	8A	2.2A	1.1A	-
	Inductive Load (DC-13)	4A	1.1A	0.55A	-

Contact Block Mounting Position

Contact		Operator Position		
		Free	Push	-
1	NO		●	
2				
3	NC	●		


●=On (closed contact)
Blank=Off (open contact)

Screw Type Illuminated Emergency Stop Switches

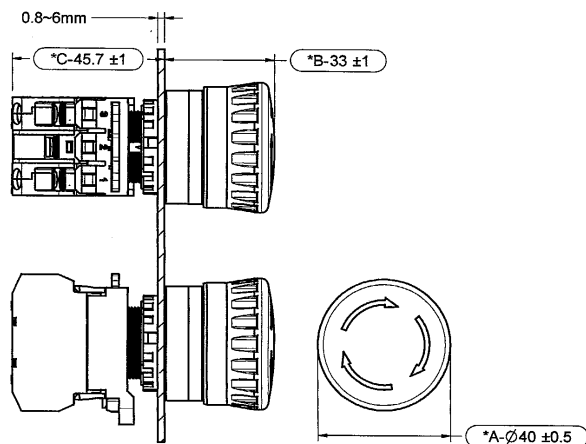

Dimensions : Millimetres

Hole Dia

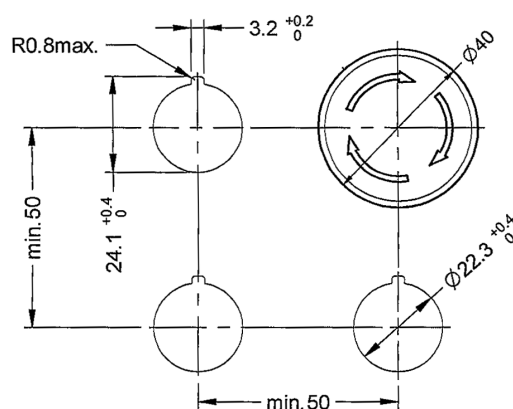

multicomp

Illuminated Emergency Stop Switches, 1NO+1NC



Part Number Explanation

MCA20L	-	V	4	E	11	QX	R
Type		Emergency Stop	Mushroom	Standard	1NO+1NC	Lamp	Red
							0: Without Lamp Led 2: 6V AC/DC 3: 12V AC/DC 4: 24V AC/DC H: 110V AC/DC M3: 230/240V AC/DC Incandescent 5: 6V AC/DC 6: 12V AC/DC 7: 24V AC/DC

Part Number Table

Description	Part Number
Illuminated Emergency Stop Switches, 40mm, 1NO+1NC, Red	MCA20L-V4E11QM3R
	MCA20L-V4E11Q5R
	MCA20L-V4E11Q6R
	MCA20L-V4E11Q7R

