

C2 Emergency Stop Switch **multicomp**

**RoHS
Compliant**



Specifications

Mechanical Life	: >0.25 million operations
Electrical Life	: >0.1 million operations
Rated Insulation Voltage	: 300V
Rated Thermal Current	: 5A
Insulation Resistance	: 100MΩ
Dielectric Strength	: 2,000V AC, 1 minute
Panel Thickness	: 0.8mm to 12mm
Degree of protection	: IP65
Storage Temperature	: -45°C to +85°C
Operating Temperature	: -25°C to +55°C

Contact Ratings (B300/R300)

Rated Insulation Voltage		300V			
Rated Thermal Current		5A			
Operating Voltage		12V	30V	125V	250V
AC	Resistive Load (AC-12)	5A	5A	4A	2A
50/60 Hz	Inductive Load (AC-15)	5A	5A	3A	1.5A
DC	Resistive Load (DC-12)	1A	1A	0.32A	0.16A
	Inductive Load (DC-13)	1A	1A	0.22A	0.11A




Contact Block Mounting Position

Contact			Operator Position	
Configuration	Mounting	Position	Free	Push
10	1	NO		•
	2	LED		
01	1	NC	•	
	2	LED		

Note

- There are no → function for 1NO(10) & 2NO(20)

Emergency Stop Switches

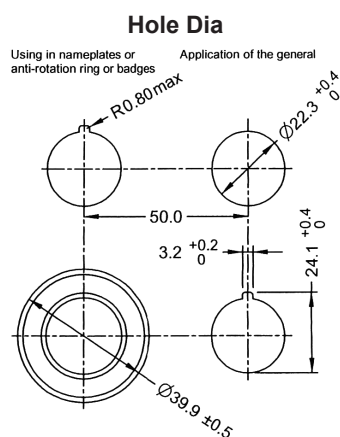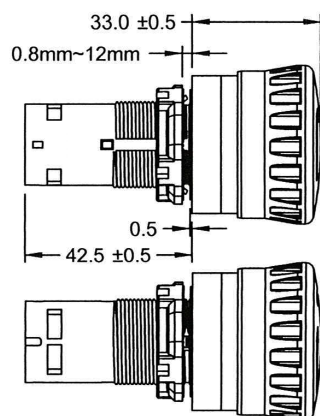


Dimensions : Millimetres

multicomp

C2 Emergency Stop Switch

Part Number Explanation

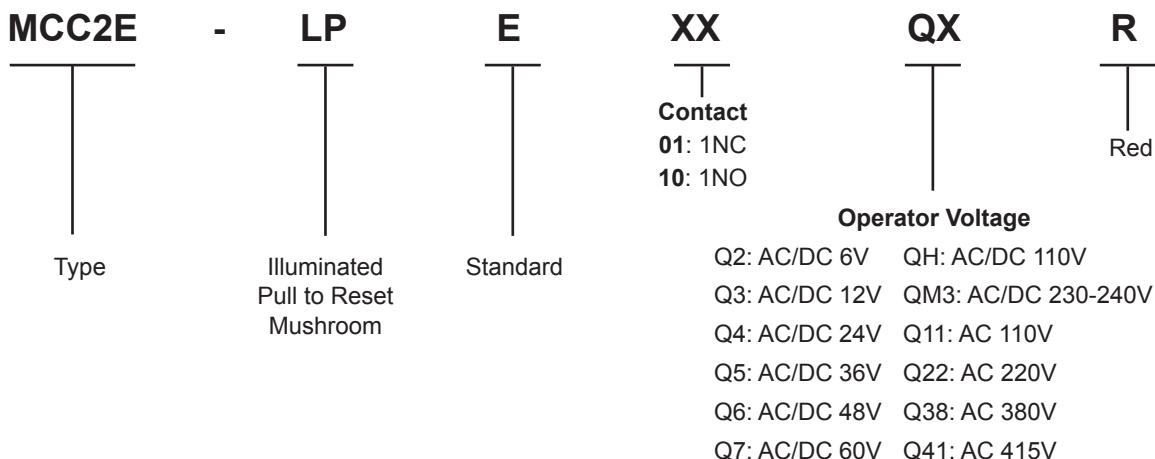

Part Number Table

Description	Part Number
Illuminated Emergency Stop Switch, 40mm, 1NO, Red	MCC2E-LPE10QM3R
Illuminated Emergency Stop Switch, 40mm, 1NC, Red	MCC2E-LPE01QM3R