


ESD STATIC PROTECTION



900-002/900-012 Wrist Strap Series

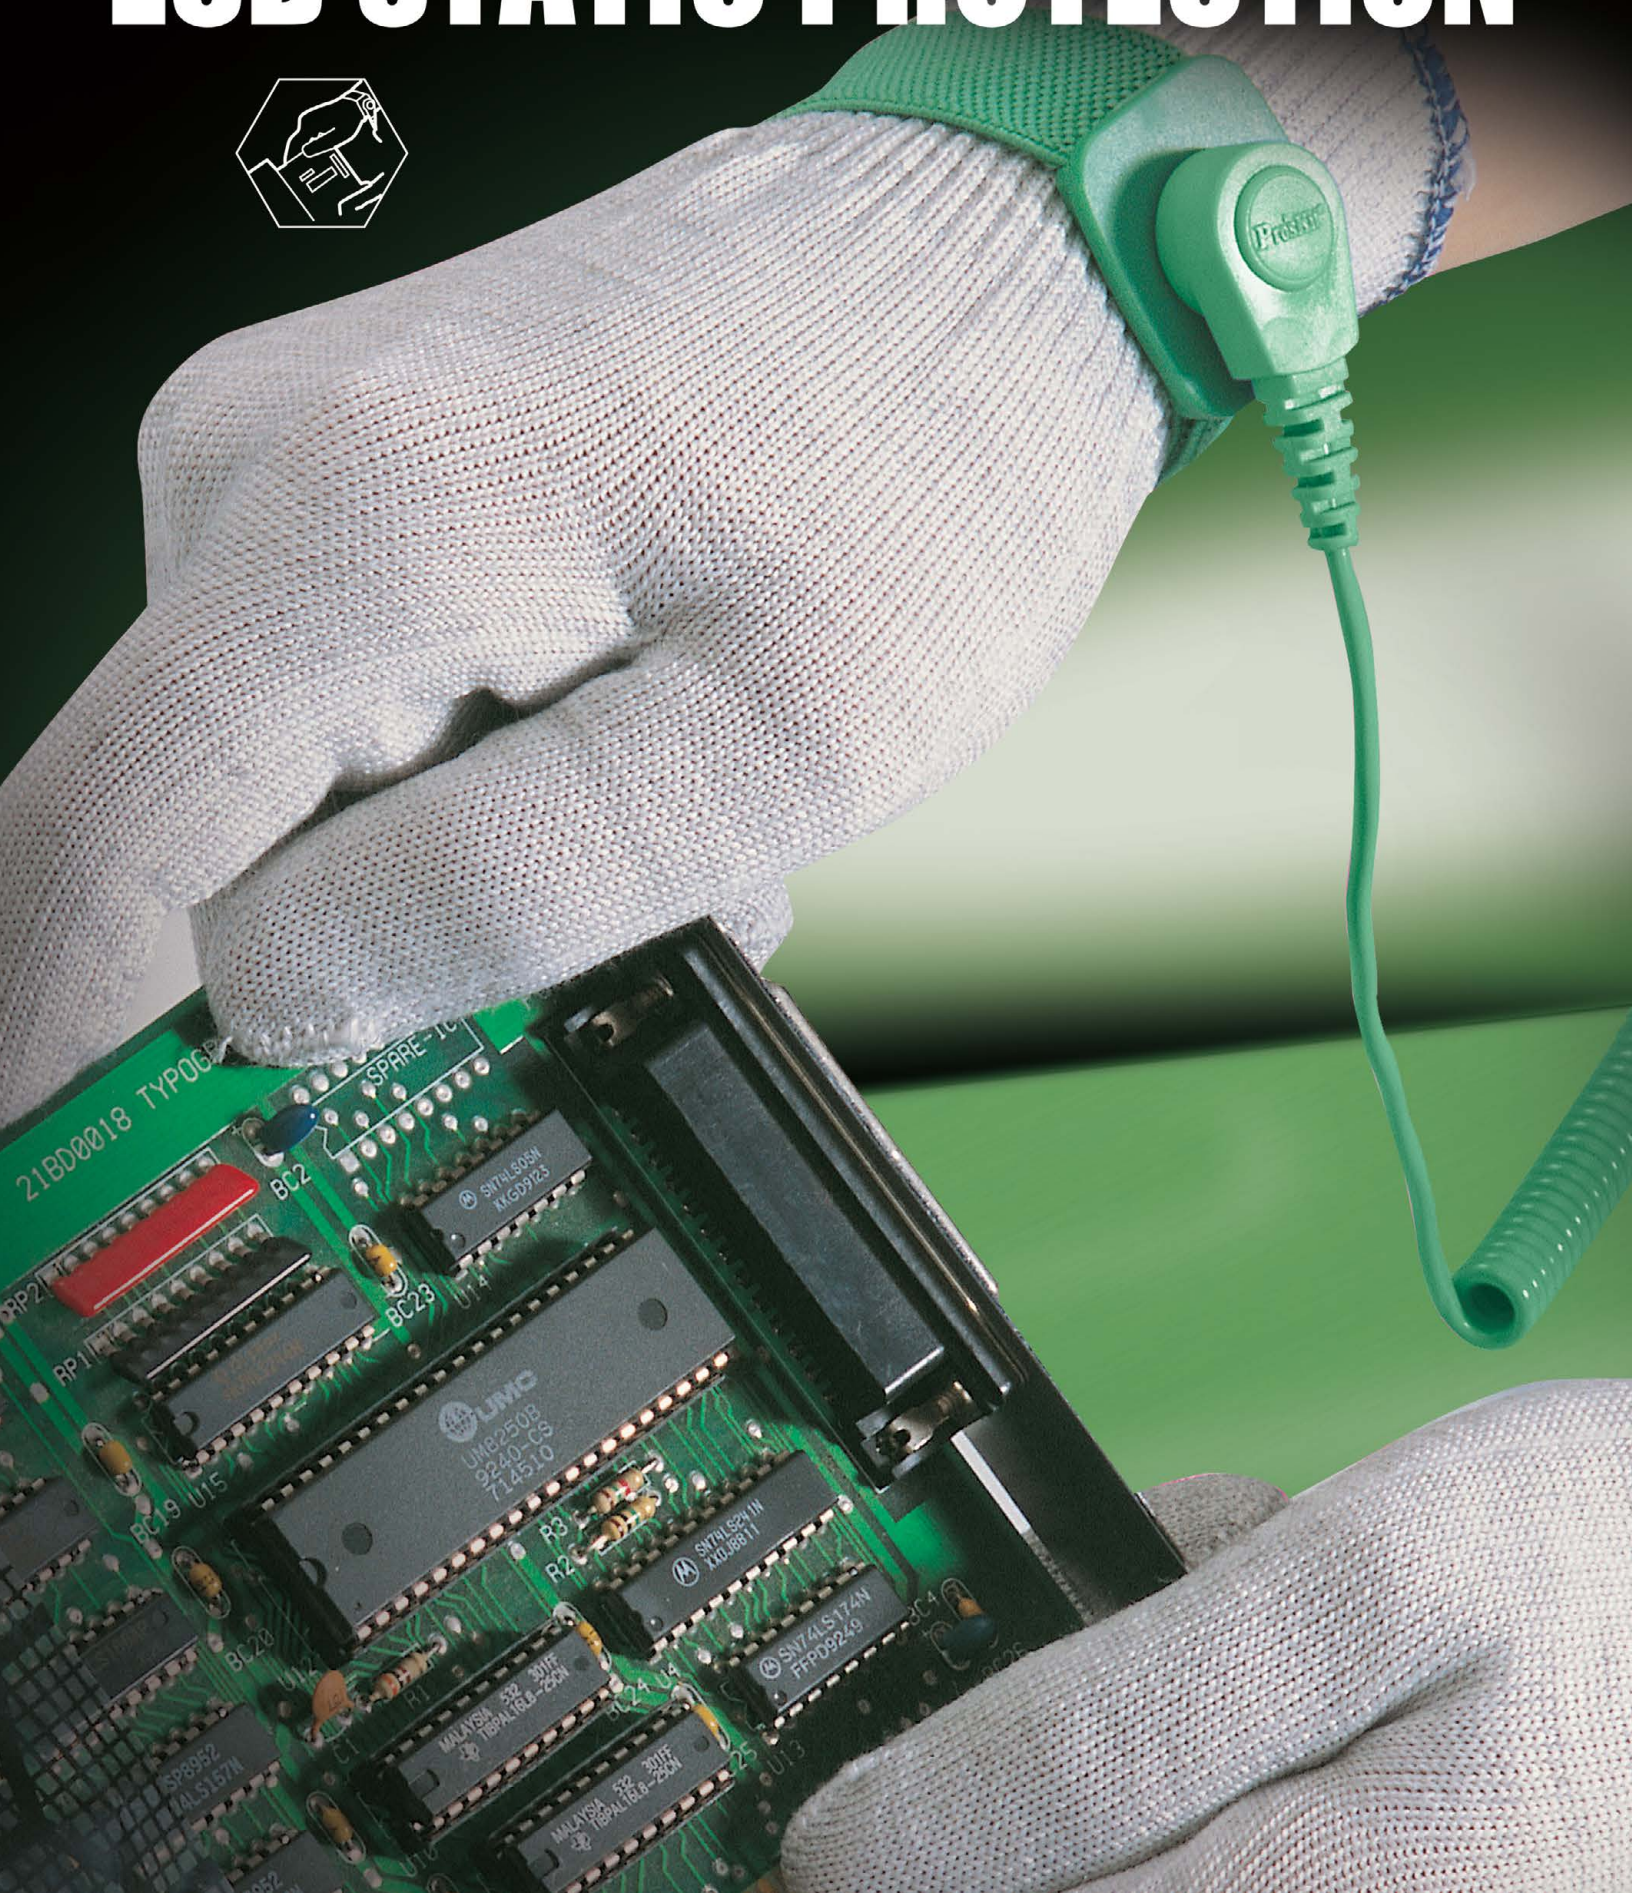

Model No.	Band resistivity	Wrist strap resistivity	Band Size	Cord Size (feet)	Individual packing
900-002	<50Ω	10 ⁶ Ω	Fixed	10 (3M)	Blister card
900-012				6 (1.5M)	

900-022/900-023 Wrist Strap Series



Model No.	Band resistivity	Cord resistivity	Band size type	Cord Size (feet)	Individual packing
900-022	<10 ⁴ Ω	10 ⁶ Ω	Adjustable	10 (3M)	Blister card
900-023				6 (1.5M)	

900-056 Field Service Kit




Material	Conductive PVC
Resistivity	10 ⁹ ~10 ¹¹ Ω
Wrist belt	With 6ft wrist strap and 10ft grounding wire w/alligator clip
Size(mm/inch)	650x600/25.6x23.6
Individual packing	Color box



900-114/900-116 Static-Dissipative Mat



Model No.	900-114	900-116
Material	Face layer: 0.2mm laminated PVC Center, Layer: 1.7mm PVC foam, Bottom layer: 0.1mm PVC foam, Combination layer: conductive treatment	
Resistivity	Face & Center & Bottom, Layers: 10M~1KMΩ/SQ Combination layer: 1K~1MΩ/SQ, Static decay time: less than 0.5sec	
Heat tolerance	70°C	
Description	Static dissipative mat for keyboard & mouse & touch	Static dissipative mat for OA desk-top
Size(mm/inch)	600x1200/23.6x47.2	600x600/23.6x23.6
Individual packing	Color box	Color box

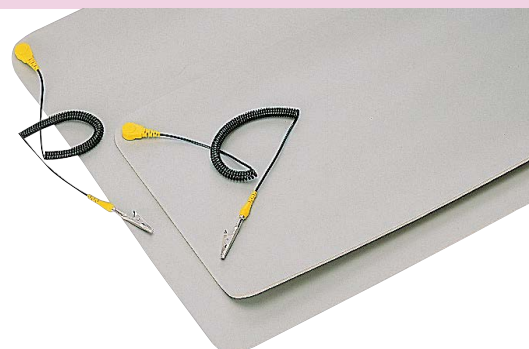

900-132/900-133 Wrist Strap Series



Model No.	Band resistivity	Cord resistivity	Band size type	Cord Size (feet)	Individual packing
900-132	<50Ω	10 ⁶ Ω	Adjustable	10 (3M)	Blister card
900-133				6 (1.5M)	

900-057 Foot & Heel Ground



These versatile heel grounders have a specially designed dual-layered cup construction for superior floor contact.



Polyester+conductive fiber



Resistivity	Wrist belt	Individual packing
1-2 x 10 ⁶ Ω	Adjustable	Blister card