


# RF - Coaxial Cable Assemblies



**RoHS  
Compliant**

## Electrical Performance:

|                                 |                |
|---------------------------------|----------------|
| Impedance                       | : 50Ω          |
| Frequency Range                 | : DC ~ 6.0 Ghz |
| Working Voltage                 | : 335Vrms Max. |
| Dielectric Withstanding Voltage | : 750Vrms Max. |
| Insulator Resistance            | : 5000MΩ Min.  |

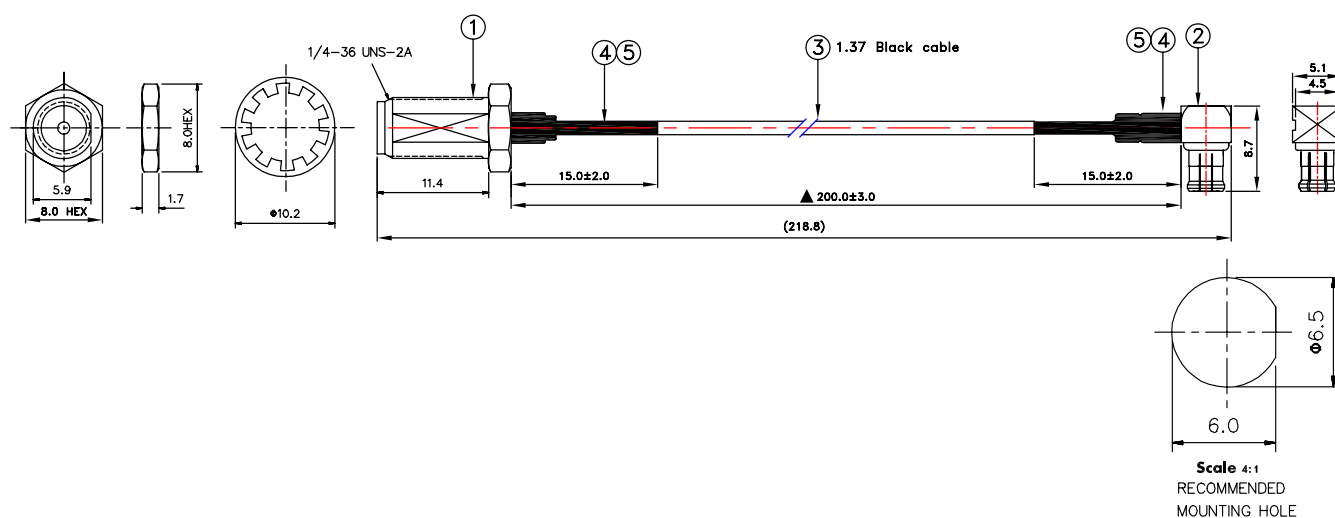

Dimensions : Millimetres

| Sl. | Description                                    | Qty |
|-----|------------------------------------------------|-----|
| 1.  | RP-SMA B/H Jack Crimp for 1.37mm               | 1   |
| 2.  | MCX R/A Plug Crimp for OD 1.37mm Cable         |     |
| 3.  | 1.37mm Black Cable                             |     |
| 4.  | Heat Shrink Tube F32 Ø2mm L=10mm Colour: Black | 2   |
| 5.  | Heat Shrink Tube F32 Ø3mm L=15mm Colour: Black |     |

| Specification  | DC ~ 6.0 GHz  |
|----------------|---------------|
| VSWR           | 1.65 : 1 Max. |
| Insertion Loss | -1.5 dB Max.  |

## Part Number Table

| Description                             | Part Number |
|-----------------------------------------|-------------|
| R/A MCX - RPSMA Panel Front Lock, 200mm | MC001900    |

