



RF - Coaxial Cable Assemblies



**RoHS
Compliant**

Electrical Performance:

Impedance	: 50Ω
Frequency Range	: DC ~ 6.0 Ghz
Working Voltage	: 170Vrms Max.
Dielectric Withstanding Voltage	: 750Vrms Max.
Insulator Resistance	: 1000MΩ Min.

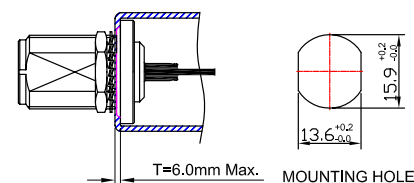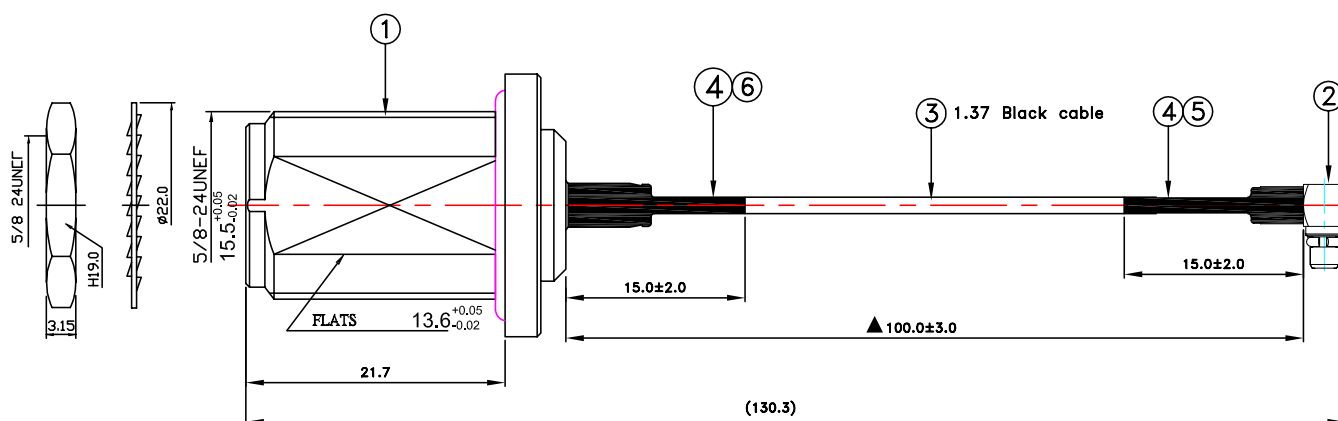

Dimensions : Millimetres

Sl.	Description	Qty
1.	N Bulkhead Jack Crimp for 1.37mm Cable	1
2.	MMCX R/A Plug Crimp for OD 1.37mm Cable	
3.	1.37mm Black Cable	2
4.	Heat Shrink Tube F32 Ø2mm L=10mm Colour: Black	
5.	Heat Shrink Tube F32 Ø3mm L=15mm Colour: Black	
6.	Heat Shrink Tube F32 Ø4mm L=15mm Colour: Black	1

Specification	DC ~ 6.0 GHz
VSWR	1.65 : 1 Max.
Insertion Loss	-1.1 dB Max.

Part Number Table

Description	Part Number
R/A MMCX - IP67 N Panel Front Lock, 100mm	MC001893

