


Plunger Serrated



Specifications:


Material	: Full-hard beryllium copper, gold-plated over nickel
Minimum Centre Recommend	: 1.27mm
Full Travel	: 2.65mm
Spring Pressure	: 120g
Current Rating	: 3A
Contact Resistance	: 50 mΩ
Mounting Hole Size	: 0.9mm
Minimum Durability (Cycles)	: 10 ⁵
Connector Type	: Spring Probe
Series	: P50
Contact Material	: Beryllium Copper
Contact Plating	: Gold

Probe:

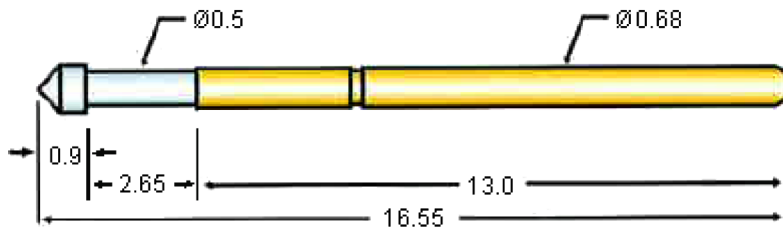

Dimensions : Millimetres

Plunger:



Part Number Table

Description	Part Number
Plunger, Serrated	P50-H-120-G