


Plunger Concave



Specifications:


Material	: Full-hard beryllium copper, gold-plated over nickel
Min. Centre Recommend	: 2.54mm
Full Travel	: 6.3mm
Spring Pressure	: 250g
Current Rating	: 3A
Contact Resistance	: 50mΩ
Mounting Hole Size	: 1.75mm
Min. Durability (Cycles)	: 10 ⁵
Connector Type	: Spring Probe
Series	: P100
Contact Material	: Beryllium Copper
Contact Plating	: Gold

Probe:

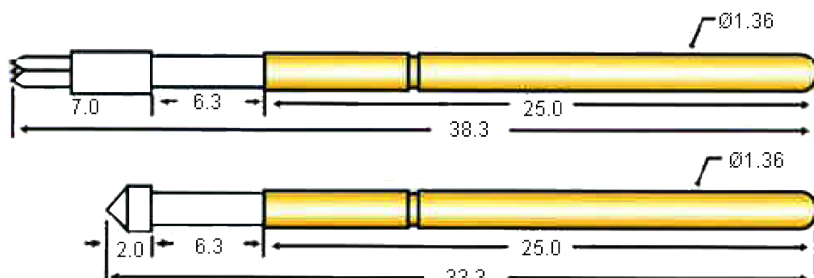

Dimensions : Millimetres

Plunger:

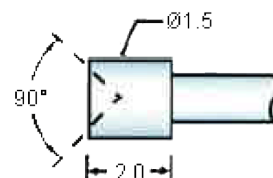

Part Number Table

Description	Part Number
Plunger, concave	P100-A-250-G

