

DPPK Series D-Sub Connector Kit

**RoHS
Compliant**

Specifications

Gender	: Plug, Receptacle
No. of Contacts	: 9, 15, 25, 37 Contacts
Shell Size	: DE, DA, DB, DC
Contact Termination	: Solder
Kit Includes	: D-Sub Connector & Hood


Hoods

Material	: Nylon UL94V-2
Temperature Range	: -55°C to +105°C
Cable Diameter	: 3mm – 11mm

Connectors

Current Rating	: 3A
Contact Resistance	: 25mΩ Max.
Insulation Resistance	: 1000MΩ Max. @ 500V
Dielectric Voltage	: 1000V at 1 minute
Operating Range	: -55°C to +105°C
Insulator Material	: PBT, UL94V-O
Contacts Material	: Brass, Au over Ni Plating
Shell Material	: Brass, Sn Plating

Diagram

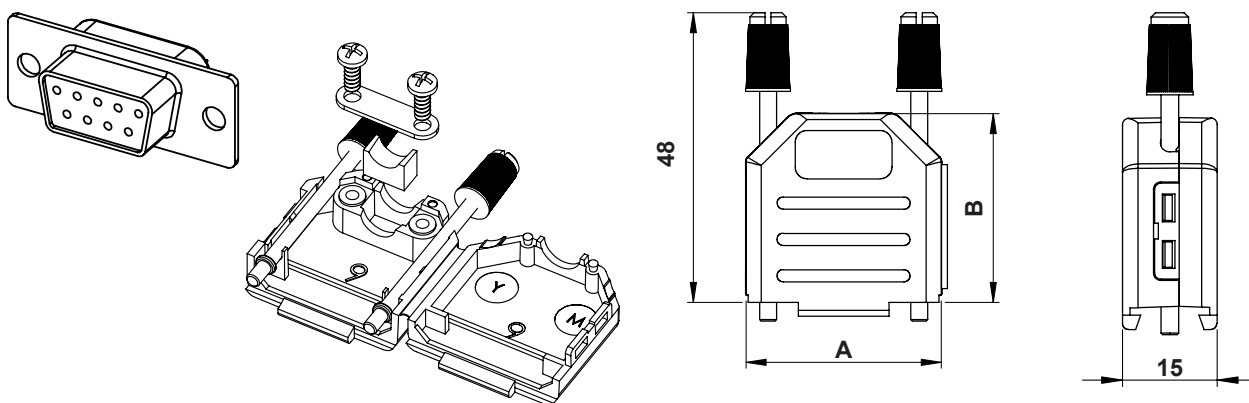

Dimensions : Millimetres

Type	A	B
MC-DPPK9	32.4mm	31.3mm
MC-DPPK15	40.7mm	30.8mm
MC-DPPK25	54.4mm	37.3mm
MC-DPPK37	70.9mm	36mm

