


## 4mm Uninsulated Banana Jack w/ Ø2mm Hole Terminal - M6 Threaded Stud and Hex Nuts

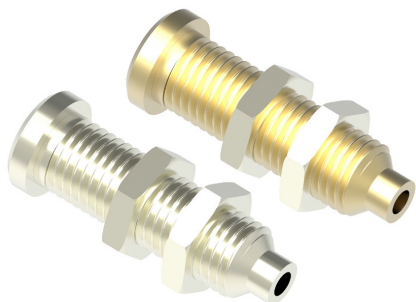

### Specifications

Connector Type	: 4mm Banana Jack
Connector Mounting	: Panel Mount
Termination Type	: Ø2mm Hole Terminal – M6 Threaded Stud and Hex Nuts
Voltage Rating	: ≤33V AC, ≤70V DC
Current Rating	: 36A
Contact Material	: Gold Nickel Plated (Optional)
Terminal Dimension	: M6 × 0.75

### Application

General purpose electric and electronic testing, controlling and measuring.

### Part Number Table

Description	Part Number
4mm Uninsulated Banana Jack w/ Ø2mm Hole Terminal, M6 Threaded Stud and Hex Nuts, Panel, 33V AC/70V DC, 36A	72-14130
4mm Uninsulated Golded Banana Jack w/ Ø2mm Hole Terminal, M6 Threaded Stud and Hex Nuts, Panel, 33V AC/70V DC, 36A	72-14132

