


4mm Banana Plug to Plug Stackable Patchcord - 1mm² PVC

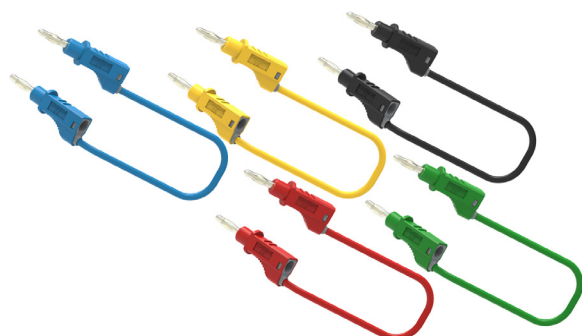

Specifications

Lead Length	: 250mm/9.9" 500mm/19.7" 1m / 3.3ft 1.5m / 4.9ft 2m / 6.6ft
Connector Type A	: Stacking 4mm Banana Plug
Connector Type B	: Stacking 4mm Banana Plug
Voltage Rating	: ≤33VAC/≤70VDC
Current Rating	: 20A
Resistance	: 250mm: 12mΩ 500mm: 15mΩ 1m: 25mΩ 1.5m: 35mΩ 2m: 45mΩ
Cable	: 1mm ² , PVC
Contact Material	: Brass and Beryllium Copper, Nickel Plated
Insulator Material	: Polyamide and Polypropylene
Insulator Colour	: Blue, Yellow, Black, Red and Green
Temperature	: -20°C to 80°C

Application

General purpose electric and electronic testing, controlling and measuring.

Part Number Table

Description	Insulator Colour	Lead Length	Part Number
Test Lead, Stacking 4mm Banana Plug to Plug, 1mm ² PVC, 33V AC/70V DC, 20A	Blue	250mm	72-13764
	Yellow	250mm	72-13766
	Black	250mm	72-13768
	Red	250mm	72-13770
	Green	250mm	72-13772
	Blue	500mm	72-13774
	Yellow	500mm	72-13776



4mm Banana Plug to Plug Stackable Patchcord - 1mm² PVC



Description	Insulator Colour	Lead Length	Part Number
Test Lead, Stacking 4mm Banana Plug to Plug, 1mm ² PVC, 33V AC/70V DC, 20A	Black	500mm	72-13778
	Red	500mm	72-13780
	Green	500mm	72-13782
	Blue	1m	72-13734
	Yellow	1m	72-13736
	Black	1m	72-13738
	Red	1m	72-13740
	Green	1m	72-13742
	Blue	1.5m	72-13744
	Yellow	1.5m	72-13746
	Black	1.5m	72-13748
	Red	1.5m	72-13750
	Green	1.5m	72-13752
	Blue	2m	72-13754
	Yellow	2m	72-13756
	Black	2m	72-13758
	Red	2m	72-13760
	Green	2m	72-13762

