

MCR13-432

Toggle Switches





Features


- Material : Metal lever and bushing are nickel plated metal
- Terminals are nickel plated brass
- Base is phenolic
- Waterproof boot (W-72) is optional

Specifications

Rating	: 18A 125V / 10A 250V AC 3/4HP 125 - 250V AC (A.C.D.N.R) 16A 125V / 10A 250V AC 3/4HP 125 - 250V AC (G.H.I)
Contact resistance	: 50mΩ Max.
Insulation resistance	: DC 500V 100MΩ Min.
Dielectric strength	: AC 1,500V 1 minute

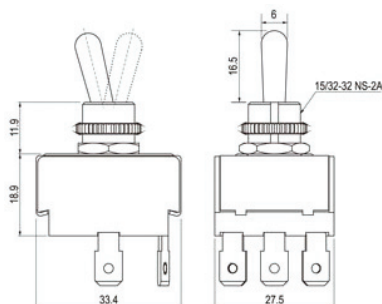

MCR13-432

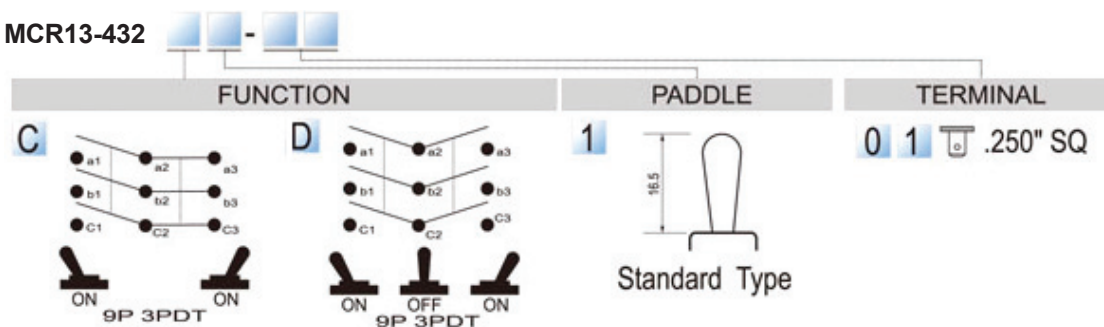

Part Number Table

Description	Part Number
Switch, Toggle, 3PDT ON-ON, SQ	MCR13-432C1-01
Switch, Toggle, 3PDT ON-OFF-ON, SQ	MCR13-432D1-01

