

Pushbutton Switches


Non-Illuminated, Round



Specifications

Contact Configuration	: SPST
Actuator	: Non-Illuminated, Round
Terminal	: Quick Connect Tab
Rating	: 1A, 125V AC/250V AC
Contact Resistance	: 30mΩ Max.
Insulation Resistance	: 100MΩ Min. 500VDC
Dielectric Strength	: 1000V AC/1 minute
Electrical Life	: 5,000 Cycles Min.
Mechanical Life	: 10,000 Cycles Min.
Terminal Material	: Copper Alloy, Silver or Gold Plated
Push Force	: > 0.3kg
Soldering	: 240°C for 3s

Dimension

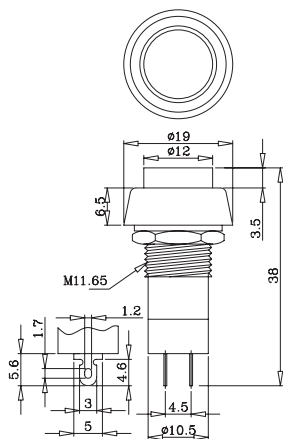

Dimensions : Millimetres

Part Number Table

Description	Actuator Colour	Switch Operation	Part Number
Pushbutton Switch, Non-Illuminated, Round, SPST, Panel, QC	Black	On-Off	MCPS25A-2
	Red	On-Off	MCPS25A-3
	Yellow	On-Off	MCPS25A-5
	Green	On-Off	MCPS25A-6
	Black	(On)-Off	MCPS25B-2
	Red	(On)-Off	MCPS25B-3
	Yellow	(On)-Off	MCPS25B-5
	Green	(On)-Off	MCPS25B-6

