


Miniature Pushbutton Switches


Non-Illuminated, Round

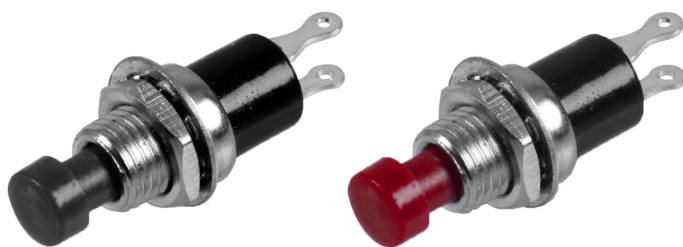

Specifications

Contact Configuration	: SPST, Push On-Off
Actuator	: Non-Illuminated, Round
Terminal	: Quick Connect Tab
Rating	: 1A, 125V AC/0.5A, 250V AC
Contact Resistance	: 2.5V DC, 1A, 20mΩ or less
Insulation Resistance	: 500V DC, 100MΩ or more
Dielectric Strength	: 1000V AC/1 minute
Electrical Life	: 5,000 Cycles Min.
Mechanical Life	: 10,000 Cycles Min.
Terminal Material	: Copper Alloy, Silver or Gold Plated
Push Force	: > 0.3kg
Soldering	: 240°C for 3s

Dimension

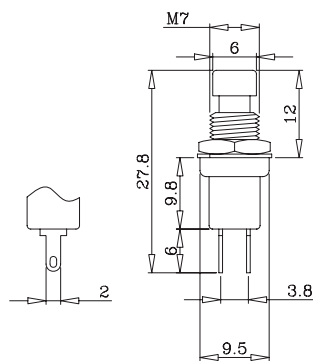

Dimensions : Millimetres

Part Number Table

Description	Part Number
Miniature Pushbutton Switch, Non-Illuminated, Round, Latching, SPST, On-Off, Panel, QC, Black	MCPS29C-2
Miniature Pushbutton Switch, Non-Illuminated, Round, Latching, SPST, On-Off, Panel, QC, Red	MCPS29C-3

