

Microswitch


SPDT, Long Lever



Specifications:

Rating	: 10A, 125/250V AC
	: 10(2)A, 125/250V AC (NEMKO/ENEC/CQC)
	: 25T130 μ 50E3
Maximum Contact Resistance	: 500M Ω
Insulation Resistance	: >100M Ω 500V DC
Withstand Voltage	: 1,000V AC for 1 minute
Operating Frequency	: Mechanical 60 operations/minute
	: Electrical 6 to 12 operation/minute
Ambient Temperature	: -25°C to +85°C
Ambient Humidity	: $\leq$ 85%RH
Mechanical Life	: 1,000,000 cycles
Electrical Life (at rate load)	: 50,000 cycles
Contact Configuration	: SPDT
Microswitch Type	: Snap Action
Actuator Style	: Long Lever
Switch Operation	: Off-On
Operating Force Max	: 60gf
Switch Terminals	: Quick Connect, Solder
External Depth	: 9.7mm
External Width	: 27.8mm
Height	: 15.8mm
Operating Force	: 0.59N
Pre-travel	: 7.6mm
Series	: M141T01
Switch Case	: PBT (Polybutylene Terephthalate)

Microswitch SPDT, Long Lever

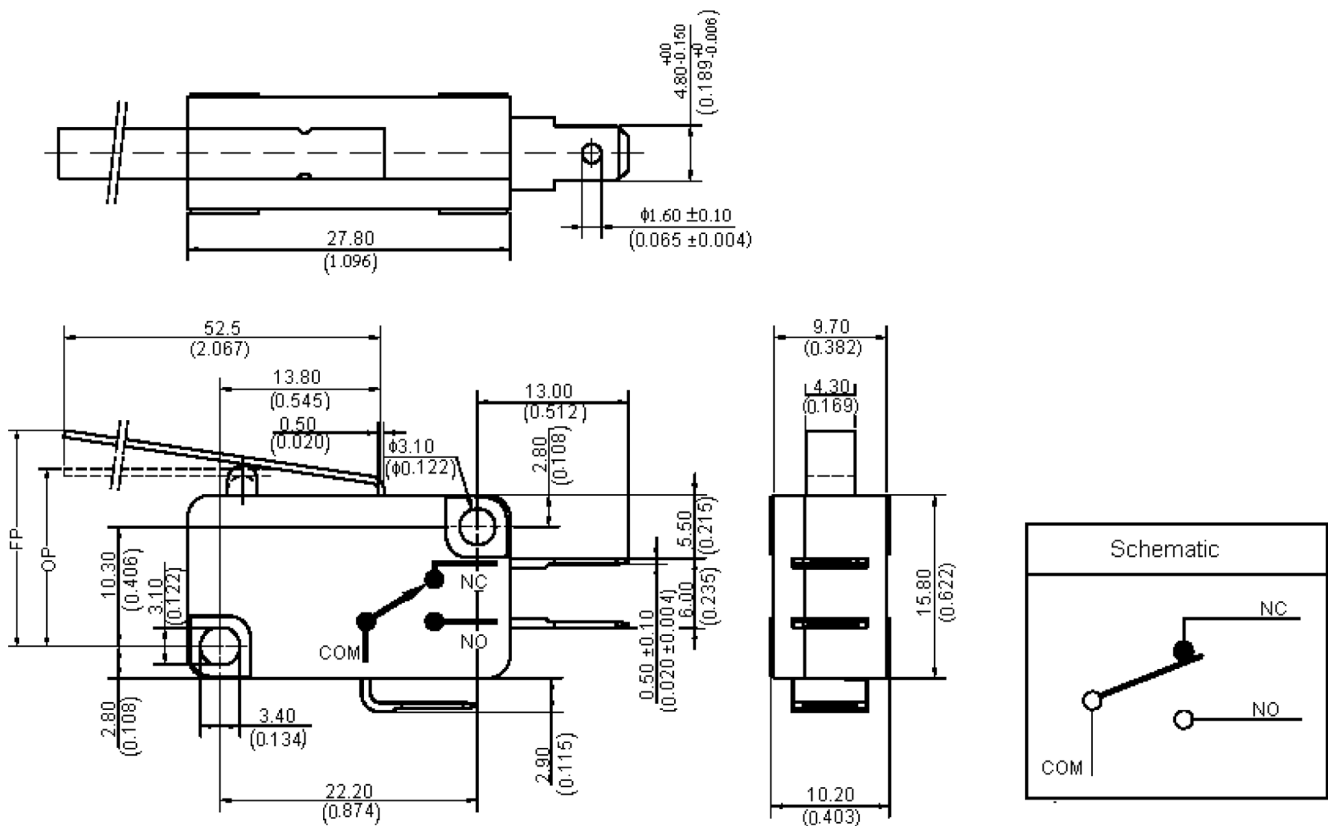

Note: Tolerances unless otherwise specified: $\pm 0.016/0.4$ inches/mm

Dimensions: Millimetres

Part Number Table

Description	Operating force (gf)				OP (mm)	Max. FP (mm)	Part number
	A	B	C	D			
Microswitch, SPDT, 10A, Long Lever	20	35	40	75	15.3 ±2.5	22	M141T02-AD0302D

