

Vinyl Insulated Double Crimp Male Disconnects



MDD1-250 MDD2-250 MDD5-250

Specifications:

Max. Electrical Rating	: 105°C 600V Max.
Insulation Material	: Vinyl
Terminal Material	: Brass
Nema Tab	: 0.032" × 0.25" (0.8mm × 6.35mm)
Double Crimp	: With Copper Sleeve on Barrel
Terminal Surface Treatment	: Tin Plated
Terminal Thickness	: 0.4mm

Wire Range (AWG)	Max. Electric Current (Amperes)	Insulation Colour	Part Number
22 to 16 (1.25mm ²)	10	Red	MDD1-250
16 to 14 (2mm ²)	15	Blue	MDD2-250
12 to 10 (5.5mm ²)	24	Yellow	MDD5-250

Diagram for MDD1-250:


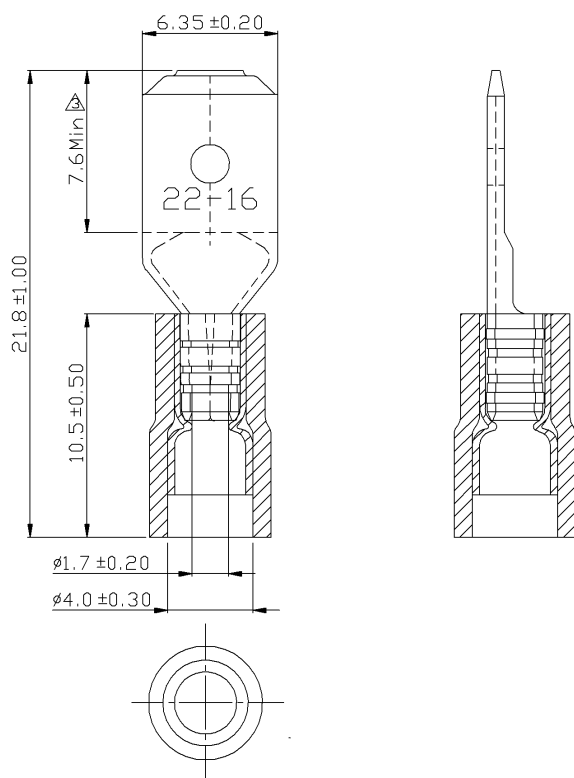


Diagram for MDD2-250:




Dimensions : Millimetres

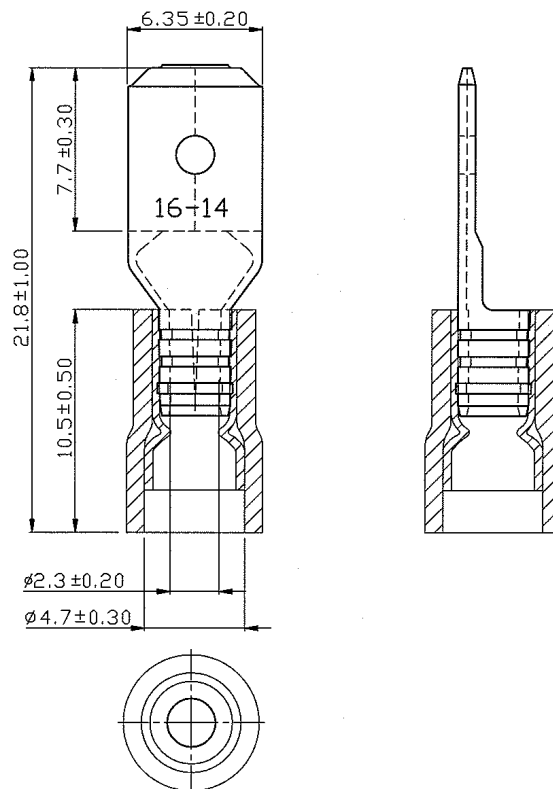

Vinyl Insulated Double Crimp Male Disconnects



Diagram for MDD5-250:

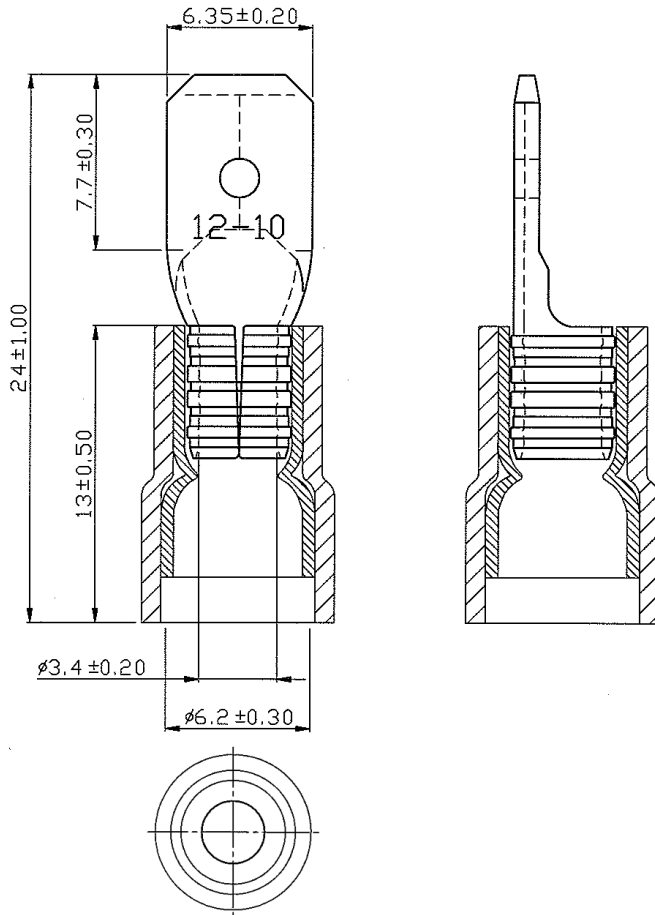

Dimensions : Millimetres

Part Number Table

Description	Colour	Part Number
Vinyl Insulated Double Crimp Male Disconnects	Red	MDD1-250
	Blue	MDD2-250
	Yellow	MDD5-250

