


Non-Insulated Copper Tubular Lugs



Maximum Electric Current:

A.W.G.	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600	750	800	1000	1250
AMP.	18	30	35	50	70	95	125	170	230	265	310	360	405	445	505	545	620	690	785	815	935	1065

Terminal Material: Copper

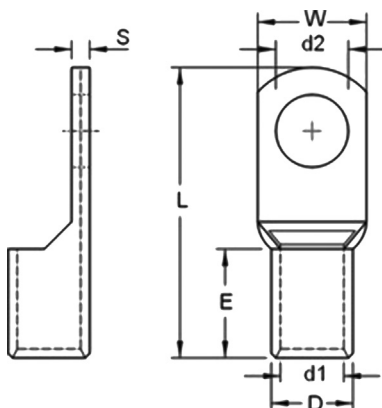

Part Number Table

Description	Wire Range A.W.G. mm ²	Stud Size		Dimension (mm)						Q'ty Box	Part No.
		d2		W	d1	D	L	E	S		
Non-Insulated Copper Tubular Lugs	12-10 A.W.G. 4-6 mm ²	#10	5.3	10	3.8	5.500	25.5	-	-	500	MC000772
		1/4	6.5	10	3.8	5.500	25.5	-	-	500	MC000773
	8 A.W.G. 10 mm ²	1/4	6.5	12.6	4.5	6.200	27	10	1.1	500	MC000761
		5/16	8.4	12.6	4.5	6.200	27	10	1.1	500	MC000762
	6 A.W.G. 16 mm ²	1/4	6.5	12.6	5.5	7.200	29.5	10.5	1.3	250	MC000763
		5/16	8.4	12.6	5.5	7.200	29.5	10.5	1.3	250	MC000764
	4 A.W.G. 25 mm ²	1/4	6.5	15	7	9.000	33	12	1.65	200	MC000765
		5/16	8.4	15	7	9.000	33	12	1.65	200	MC000766
		3/8	10.5	15	7	9.000	33	12	1.65	200	MC000767

Non-Insulated Copper Tubular Lugs



Description	Wire Range A.W.G. mm²	Stud Size		Dimension (mm)						Q'ty Box	Part No.
		d2		W	d1	D	L	E	S		
Non-Insulated Copper Tubu- lar Lugs	2 A.W.G. 35 mm²	5/16	8.4	15.2	8.2	10.600	38	14.2	2.5	200	MC000768
		3/8	10.5	15.2	8.2	10.600	38	14.2	2.5	100	MC000769
	1/0 A.W.G. 50 mm²	5/16	8.4	18.5	10	13.000	44.5	18	2.9	100	MC000770
		3/8	10.5	18.5	10	13.000	44.5	18	2.9	100	MC000771
		1/2	13	18.5	10	13.000	44.5	18	2.9	100	MC000774

