


Non-Insulated Flared Copper Tubular Lugs



Maximum Electric Current:

A.W.G.	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300
AMP.	35	50	70	95	125	170	230	265	310	360	405	445

Terminal Material: Copper Tubular

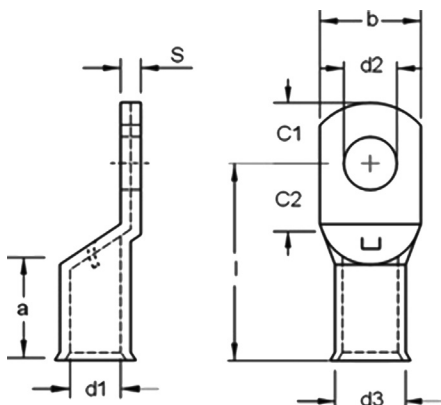

Part Number Table

Description	Wire Range A.W.G. mm ²	Dimension (mm)									Q'ty Box	Part No.
		a	b	C1	C2	d1	d2	d3	l	S		
Non-Insulated Flared Copper Tubular Lugs	8 A.W.G. 10 mm ²	10	12	6.5	7.5	4.5	5.5	7	22	1.8	500	MC000746
		10	12	6.5	7.5	4.5	6.4	7	22	1.8	500	MC000747
		10	15	10	10	4.5	8.4	7	25	1.5	500	MC000748
		10	17	12	12	4.5	10.5	7	27	1.3	500	MC000749



Non-Insulated Flared Copper Tubular Lugs



Description	Wire Range A.W.G. mm ²	Dimension (mm)									Q'ty Box	Part No.
		a	b	C1	C2	d1	d2	d3	l	S		
Non-Insulated Flared Copper Tubular Lugs	6 A.W.G.	13	12	6.25	7.5	5.5	6.4	8.5	27	2.8	250	MC000750
		13	15	8.5	9.5	5.5	8.4	8.5	29	2.1	250	MC000751
	16 mm ²	13	17	10.5	11.5	5.5	10.5	8.5	31	2	250	MC000752
		15	14	7.5	7.5	7.0	6.4	10	30	2.8	200	MC000753
	4 A.W.G.	15	16	10	10	7.0	8.4	10	32	2.4	200	MC000754
		15	18	12	12	7.0	10.5	10	34	2.2	200	MC000755
		17	17	10	10	8.5	8.4	12	34	3.2	200	MC000756
	2 A.W.G.	17	19	12	12	8.5	10.5	12	37	2.9	200	MC000757

