


Automotive Fuse Holders

Mini-Blade Sealed 30 A In-Line



Specifications:

Rated Current	: 30 A
Minimum Insulation Resistance	: 1,000 MΩ at 500 V dc
Contact Resistance	: 5 mΩ at 1 A dc
Minimum Dielectric Strength	: 1,000 V ac for 60 seconds
Body Material	: PVC
Supply Standard Wire-AWG / Length	: 12 AWG / 10 inches loop
Water Resistant Type	: For AST blade type fuses
Contact	: Brass, tin plated
To install fuses with "loop" type wires, simply cut loop into two form separate wires of desired length	

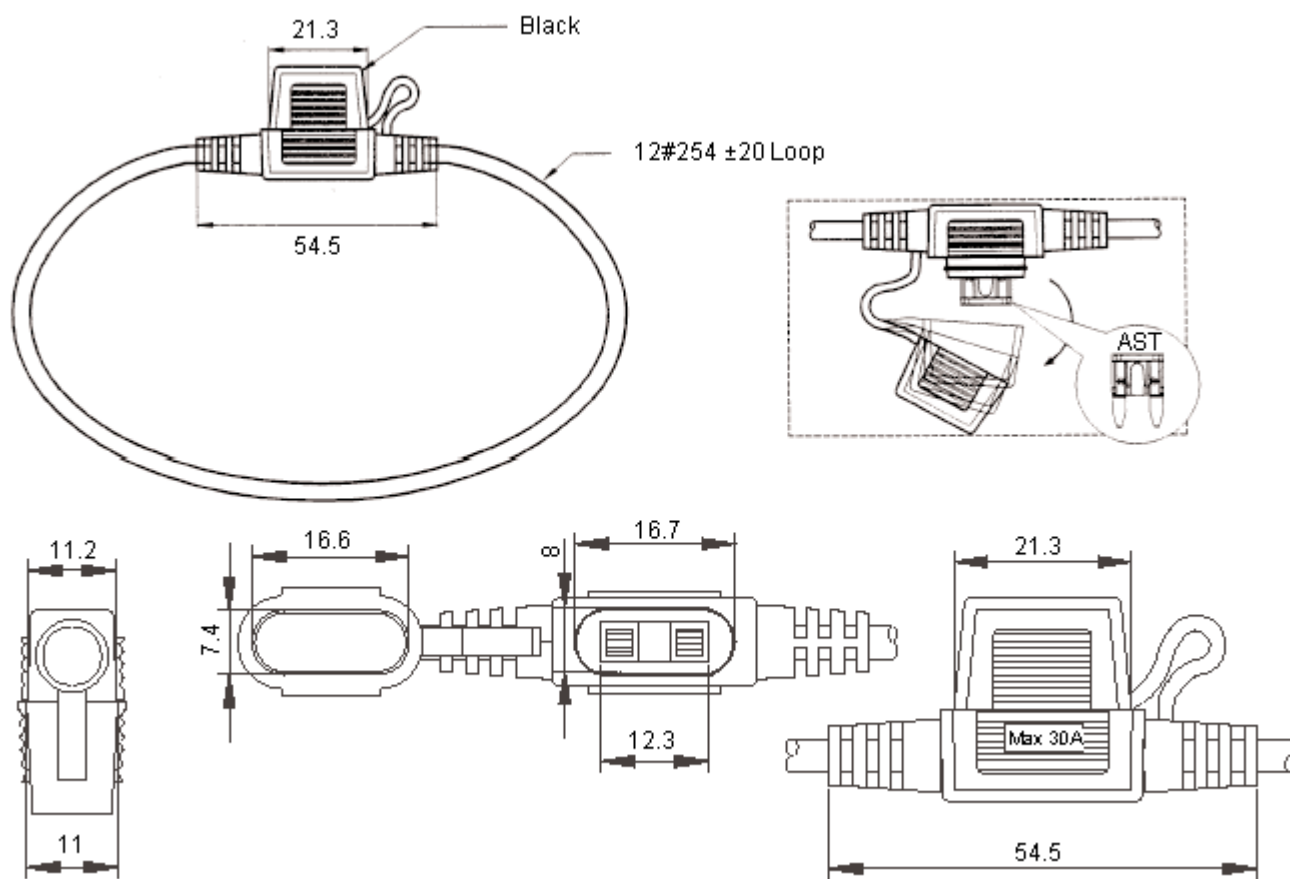

Dimensions : Millimetres

Part Number Table

Description	Part Number
Fuseholder, In-Line, Mini Blade, 30 A	MCCQ-211SN